
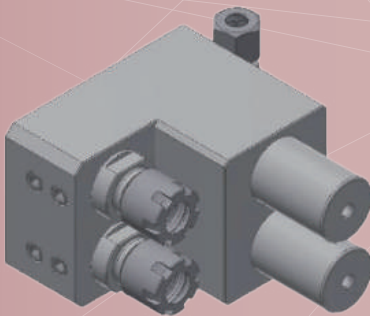
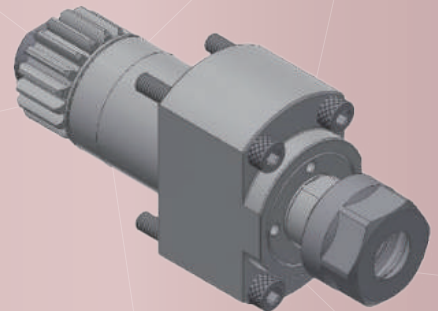
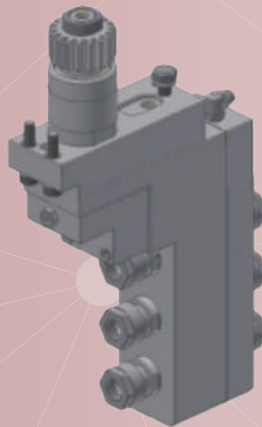
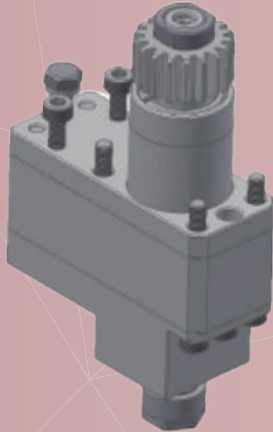
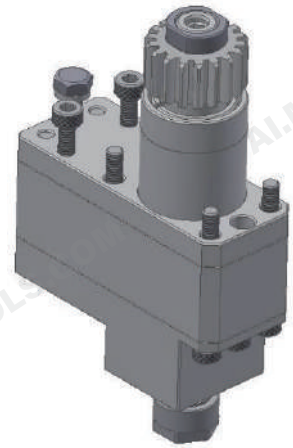


CINCOM CITIZEN

Swiss Type Toolholders


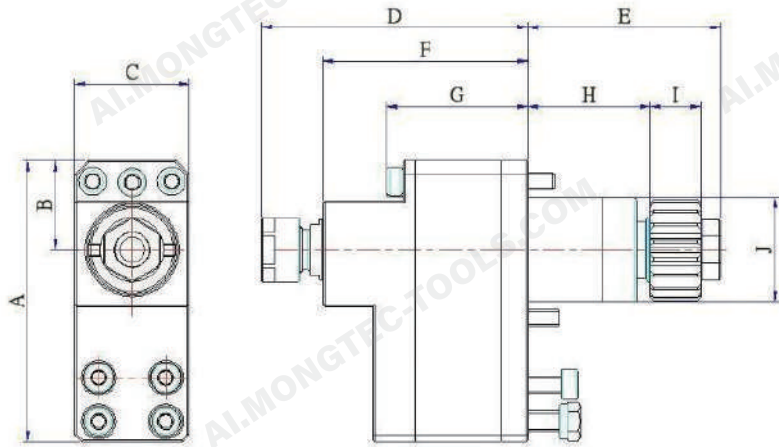


3x-Speed Live Tool Holder

Model	A20-23310	CINCOM Part No.	-
Gear Ratio	1 / 3	Max. Speed	18000 rpm
Max. Collet Dia.	7 mm		
Collet	AR11-A, ER11-A		
Compatible Machines	A20VII(2F7/3F7)/32VII(1M7/2M7)/ L20XII(2M8/2M9/2M10/2M12)/ L32(1M8/1M9/1M10/1M12)/ M32(4M3/4M5/4M7/4M8)		

Model	A	B	C	D	E	F	G	H	I	J
A20-23310	83.5	26.5	34	79.3	57.5	61	42	36.5	15	Ø 31

Unit: mm

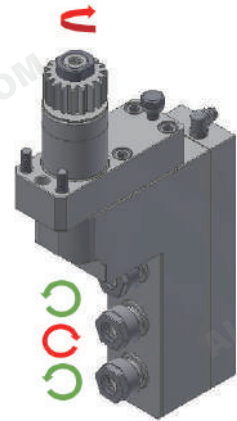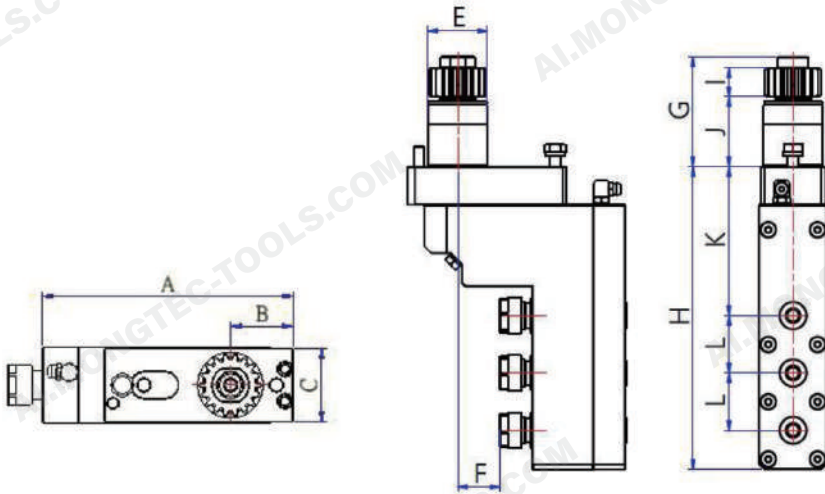


Axial Live Tool Holder

Model	BSE707-10130	CINCOM Part No.	BSE607
Gear Ratio	1 / 1	Max. Speed	6000 rpm
Max. Collet Dia.	7 mm		
Collet	Main Spindle: AR11-A, ER11-A		
Applicable Live Tool	U31B, U32B, U33B, U34B		
Compatible Machines	A20VII(2F7/3F7) / A32VII(1M7/2M7)/ L20XII(2M8/2M9/2M10/2M12)/ L32(1M8/1M9/1M10/1M12)		

Model	A	B	C	E	F	G	H	I	J	K	L
BSE707-10130	117.5	29.5	34.5	Ø 31	18.7	57.5	157	15	36.5	76.5	30

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

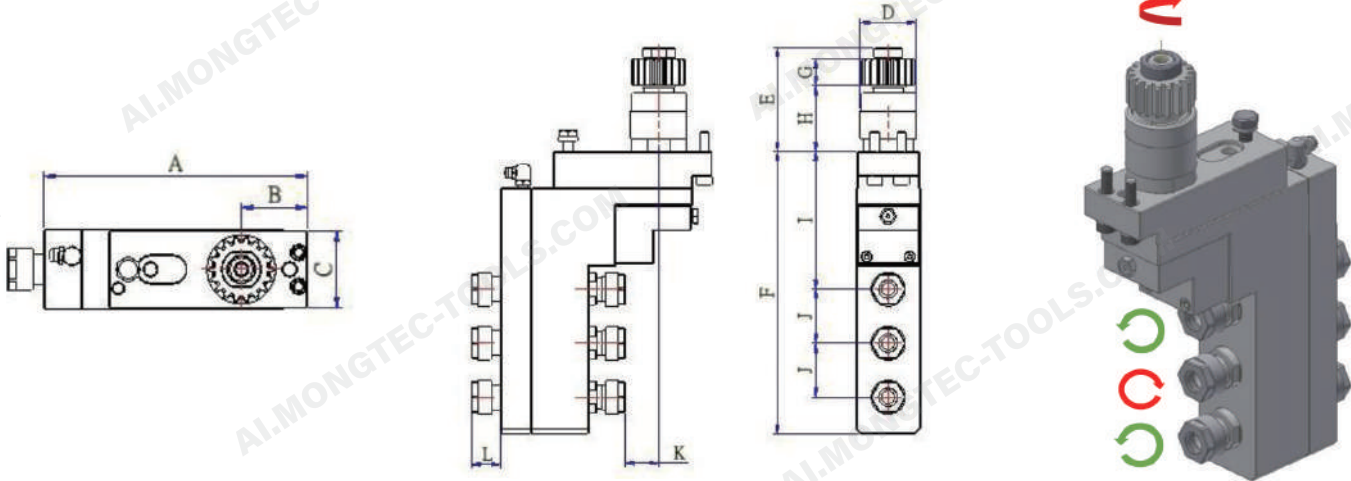


Axial Live Tool Holder

Model	BSE707-11130	CINCOM Part No.	BSE707
Gear Ratio	1 / 1	Max. Speed	6000 rpm
Max. Collet Dia.	7 mm / 7 mm		
Collet	Main Spindle: AR11-A, ER11-A Sub Spindle: AR11-A, ER11-A		
Applicable Live Tool	U31B, U32B, U33B, U34B		
Compatible Machines	A20VII(2F7/3F7), A32(1M7/2M7)/ L20XII(2M8/2M9/2M10/2M12)/ L32(1M8/1M9/1M10/1M12)		

Model	A	B	C	D	E	F	G	H	I	J	K	L
BSE707-11130	117.5	29.5	34.5	Ø 31	57.5	157	15	36.5	76.5	30	18.7	16.3

Unit: mm


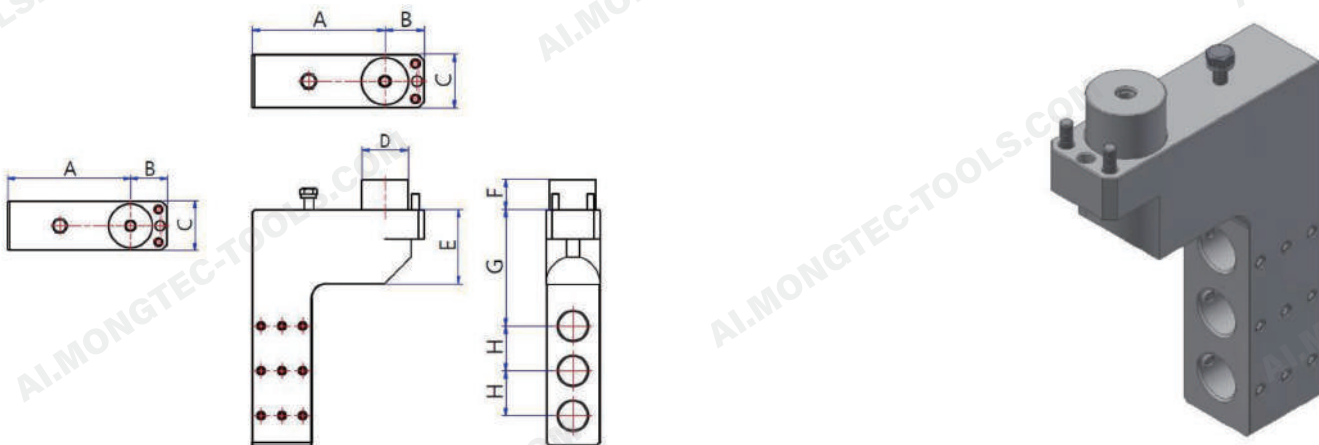


Axial Drilling Holder

Model	L220E-11030	CINCOM Part No.	GDF507
Gear Ratio	-	Max. Speed	-
Max. Collet Dia.	-	Bore Dia.	Ø19.05mm
Collet	-		
Compatible Machines	L20XII(2M8/2M9/2M10/2M12)/ L32(1M8/1M9/1M10/1M12)		

Model	A	B	C	D	E	F	G	H
L220E-11030	89	26.5	36	Ø 31	50	20	78	30


Unit: mm

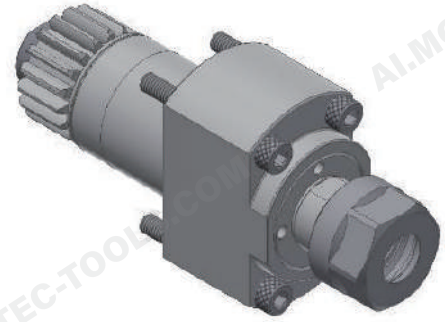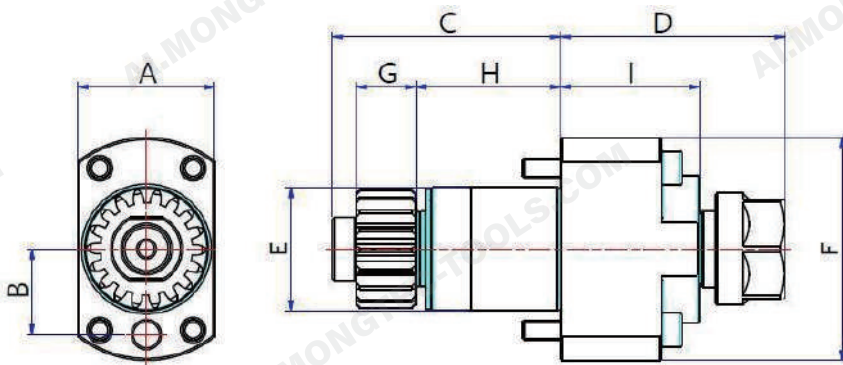

Live Tool Holder			
Model	A20-10310	CINCOM Part No.	GSC1110 GSC1310 CSM4-03
Gear Ratio	1 / 1	Max. Speed	7000 rpm
Max. Collet Dia.	10 mm		
Collet	AR16-AM, ER16-AM		
Compatible Machines	A20VII(2F7/3F7)/32VII(1M7/2M7)/ L20XII(2M8/2M9/2M10/2M12)/ L32(1M8/1M9/1M10/1M12)/ M32(4M3/4M5/4M7/4M8)		

Model	A	B	C	D	E	F	G	H	I
A20-10310	34.5	21.5	57.5	59	Ø 31	Ø 56	15	36.5	35

Unit: mm

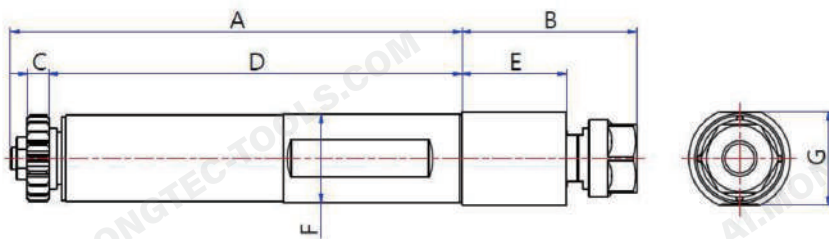


Live Tool Holder			
Model	L20VII-10310	CINCOM Part No.	GSC510 GSC1010 CSM4-01
Gear Ratio	1 / 1	Max. Speed	8000rpm
Max. Collet Dia.	10 mm		
Collet	AR16-A, ER16-A		
Compatible Machines	L16/L20(5M7/7M7)/L20E(1M8/1M9) / L20X(1M10)/M20III/M32III(2M3)/ M20III/M20V/M32III/M32V(3M3/3M5)		

Model	A	B	C	D	E	F	G
L20VII-10310	164	63.5	8	150	38	Ø 32	33.8

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

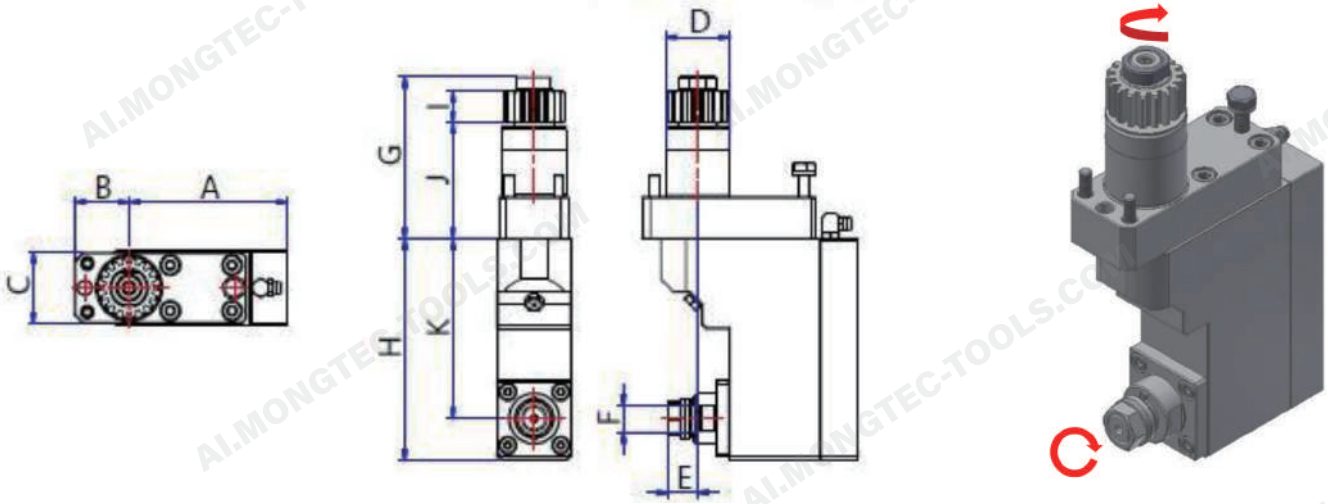


Polygon Milling Tool Holder

Model	A20-10810	CINCOM Part No.	-
Gear Ratio	1 / 1	Max. Speed	6000rpm
Cutter	KT130480058		
Compatible Machines	A20VII(2F7/3F7), A32VII(1M7/2M7)/ L20XII(2M8/2M9/2M10/2M12)/ L32(1M8/1M9/1M10/1M12)/ M32(4M3/4M5/4M7/4M8)		

Model	A	B	C	D	E	F	G	H	I	J	K
A20-10810	77	26.5	34	Ø 31	14.5	Ø 13	77.5	106	15	55.5	86

Unit: mm

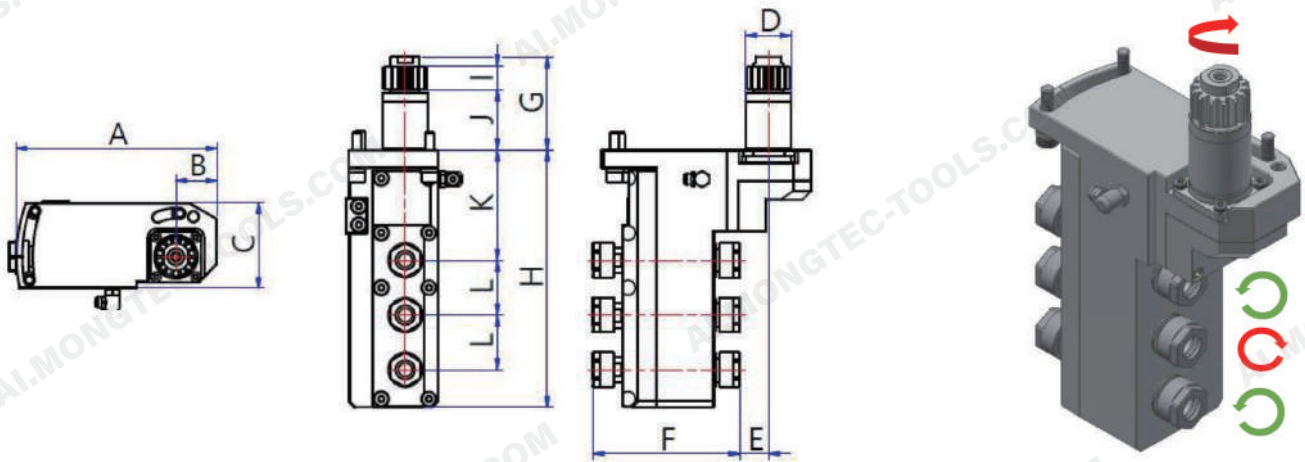




Adjustable-Angle Axial Live Tool Holder

Model	GSE3607-15130	CINCOM Part No.	GSE3607
Gear Ratio	1 / 1	Max. Speed	10000 rpm
Max. Collet Dia.	7 mm / 7mm	Angle Range	0° ~ 30°
Collet	Main Spindle: AR11-A, ER11-A Sub Spindle: AR11-A, ER11-A		
Compatible Machines	L12VII		

Model	A	B	C	D	E	F	G	H	I	J	K	L
GSE3607-15130	115.5	23.5	49	Ø 25	15.7	80.6	51	141	13	33	60.5	30

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

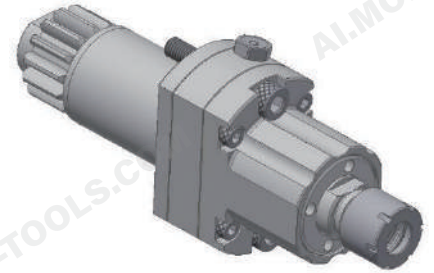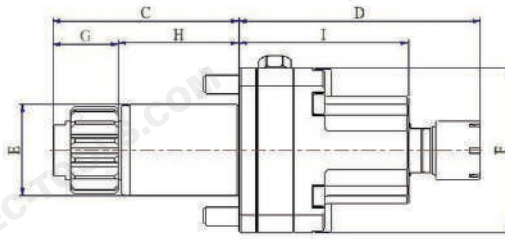


4x-Speed Live Tool Holder

Model	GSE3507-34310	CINCOM Part No.	
Gear Ratio	1 / 4 Max. Collet Dia.	Max. Speed	40000 rpm
Collet	AR11-M, ER11-M Compatible Machines		

Model	A	B	C	D	E	F	G	H	I
GSE3507-3410	28	18	51	66.2	Ø25	Ø45	18	33	46.5

Unit: mm

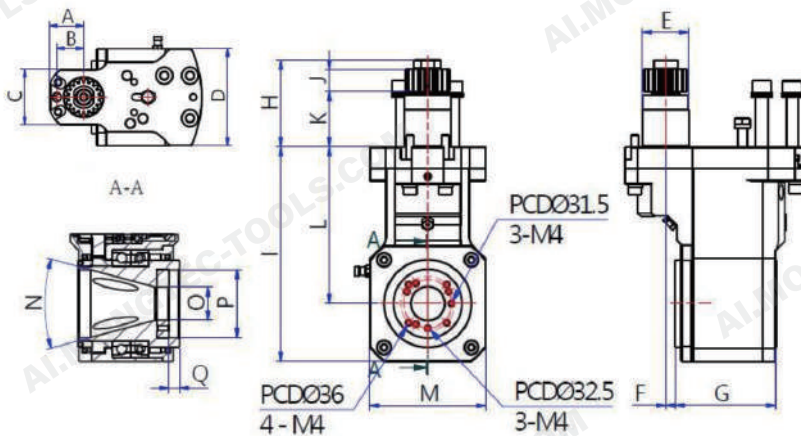


Whirling Tool Holder

Model	L20E-15510-1	CINCOM Part No.	-
Gear Ratio	1 / 1	Max. Speed	4000 rpm
Spindle Adjustment	-	Angle Range	±15°
Compatible Machines	L20XII(2M8/2M9/2M10/2M12)/ L32(1M8/1M9/1M10/1M12)		

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
L20E-15510-1	27	21.5	44	77	Ø 31	6.25	73.2 5	57.6	142. 5	15	36.6	104	77	30°	Ø 22	Ø 45	7

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

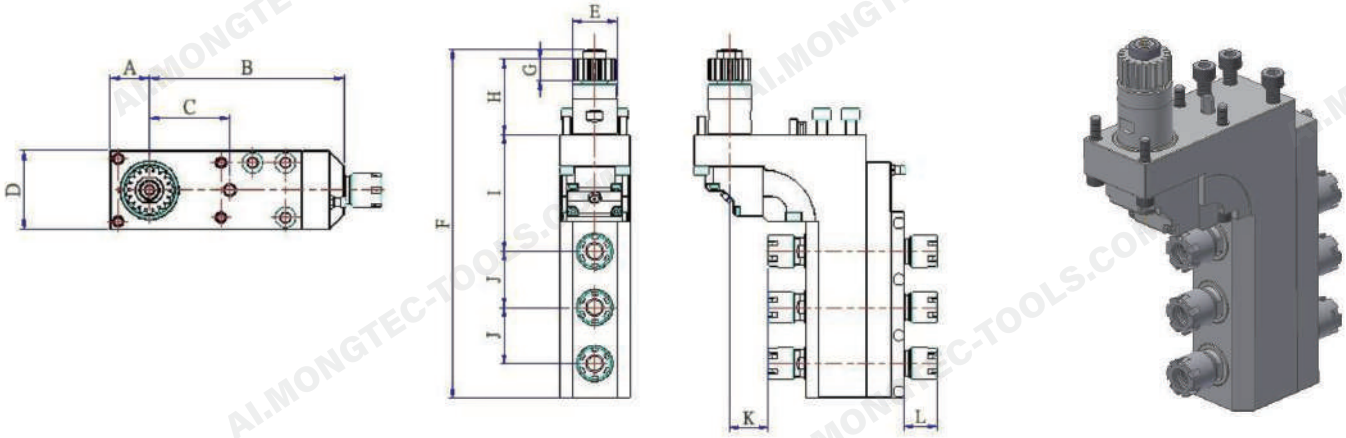


Axial Live Tool Holder

Model	L32-11130	CINCOM Part No.	GSE1810
Gear Ratio	1 / 1 Max. Collet Dia.	Max. Speed	6000rpm
Collet	AR16-M, ER16-M Compatible Machines		

Model	A	B	C	D	E	F	G	H	I	J	K	L
L32-11130	24.5	121	50	49	Ø31	242	15	52.5	81	39	26.8	23.3

Unit: mm

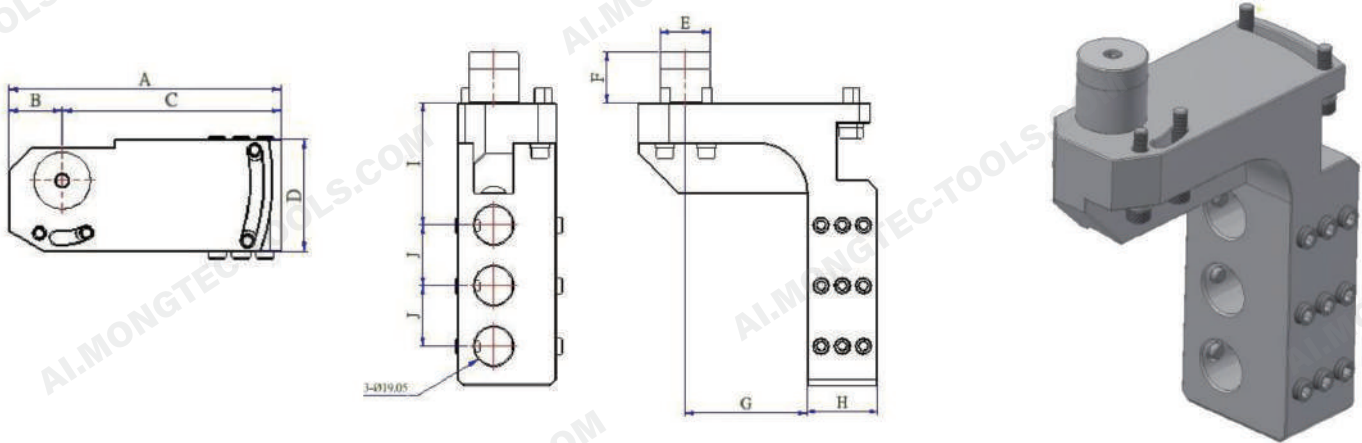


Axial Drilling Holder

Model	GSE3607-11030	CINCOM Part No.	-
Gear Ratio	Max. Speed		
Max. Drill Chuck Dia.	Collet Compatible Machines	Bore Dia.	Ø19.05mm

Model	A	B	C	D	E	F	G	H	I	J	K
GSE3607-11030	119	23.5	95.5	48	Ø25	25	60.5	35	139.5	60.5	30

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

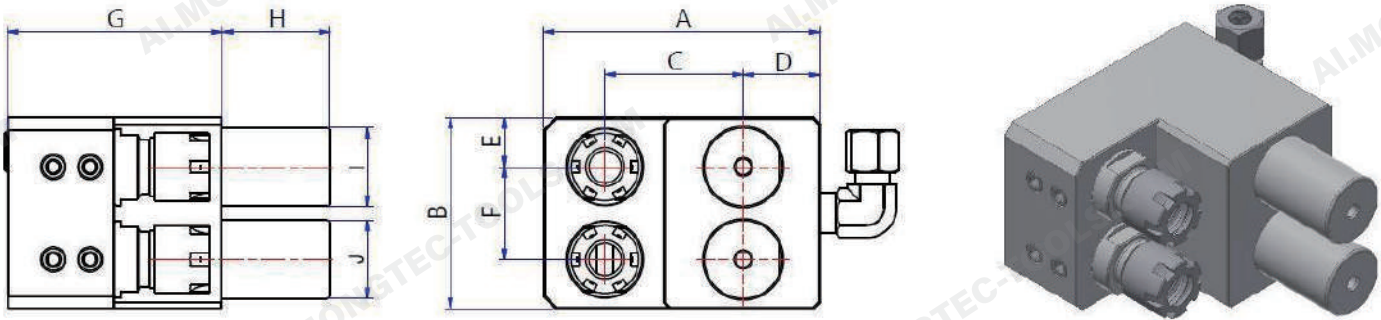


Deep-Hole Drilling Holder

Model	A20-22021	CINCOM Part No.	-
Gear Ratio	-	Max. Speed	-
Max. Collet Dia.	10 mm	Drilling Depth	95 mm
Collet	AR16-M, ER16-M		
Compatible Machines	A20VII(2F7/3F7)/32VII(1M7/2M7)		

Model	A	B	C	D	E	F	G	H	I	J
A20-22021	90	62	45	25	16	30	70	35	Ø 25.4	Ø 25.4

Unit: mm


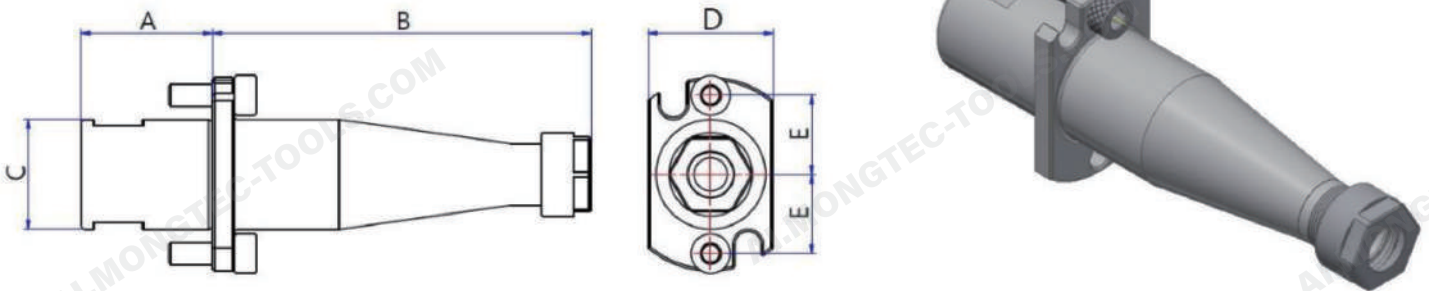


Backworking Drilling Holder

Model	GDS107-31010	CINCOM Part No.	GDS107
Gear Ratio	-	Max. Speed	-
Max. Collet Dia.	7 mm		
Collet	AR11-A, ER11-A		
Compatible Machines	L20X(1M10)		

Model	A	B	C	D	E
GDS107-31010	30	86.3	Ø 25	28.5	18

Unit: mm

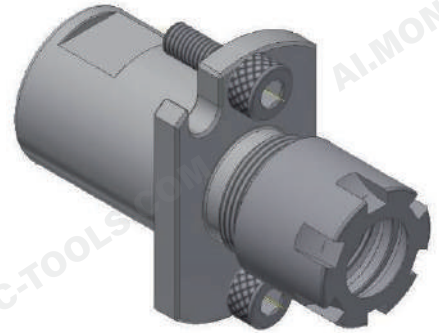
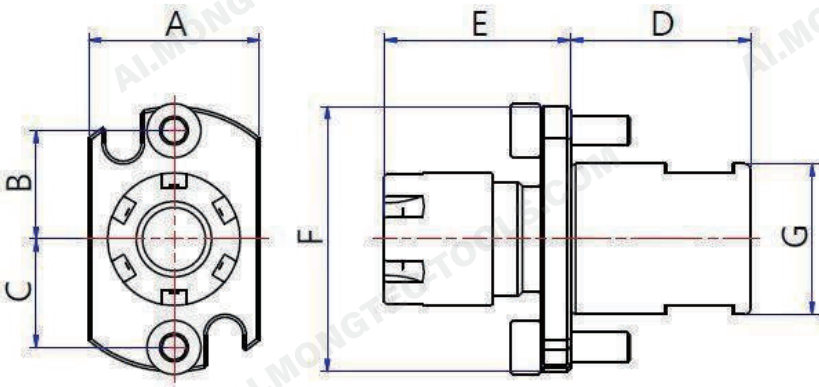


Backworking Drilling Holder

Model	GDS210-31010	CINCOM Part No.	GDS210
Gear Ratio	-	Max. Speed	-
Max. Collet Dia.	10 mm		
Collet	AR16-M, ER16-M		
Compatible Machines	L20X(1M10)/L20XII(2M8/2M9/2M10/2M12)		

Model	A	B	C	D	E	F	G
GDS210-31010	28.5	18	18	30	31	Ø 44	Ø 25

Unit: mm

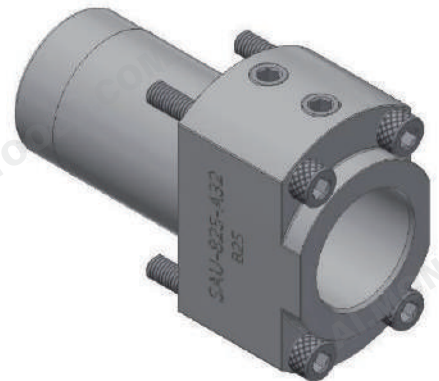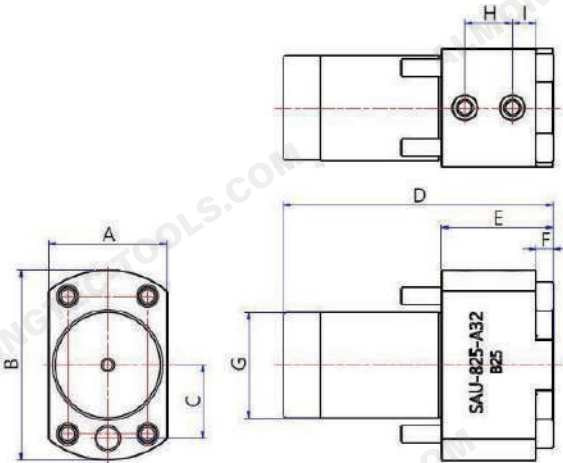



Side-Lock Tool Holder

Model	SAU825-31310	CINCOM Part No.	SAU825
Gear Ratio	-	Max. Speed	-
Max. Collet Dia.	-	Bore Dia.	Ø25.4mm
Collet	-		
Compatible Machines	A32VII(2M7)/L32(1M8/1M9/1M10/1M12)		

Model	A	B	C	D	E	F	G	H	I
SAU825-31310	35	Ø 56	21.5	79.5	33	5	Ø 31	14	7

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

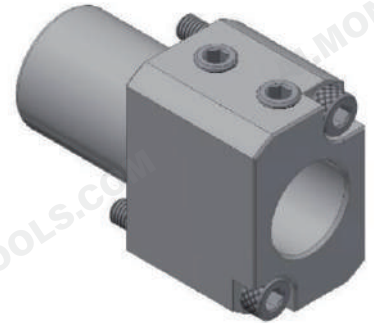
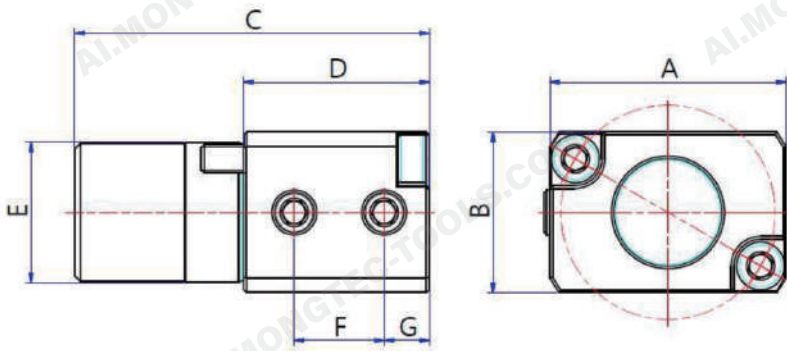


Side-Lock Tool Holder

Model	SAU919-31310	CINCOM Part No.	SAU919
Gear Ratio	-	Max. Speed	-
Max. Collet Dia.	-	Bore Dia.	Ø19.05mm
Collet	-		
Compatible Machines	L20X(1M10)/L20XII(2M8/2M9/2M10/2M12)		

Model	A	B	C	D	E	F	G
SAU919-31310	42	28.5	63	33	Ø 25	16	8

Unit: mm

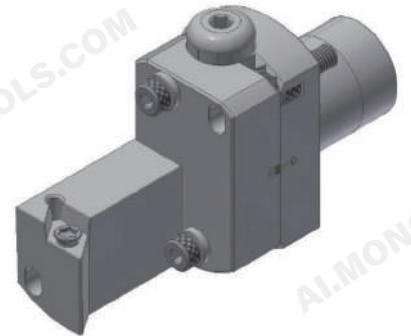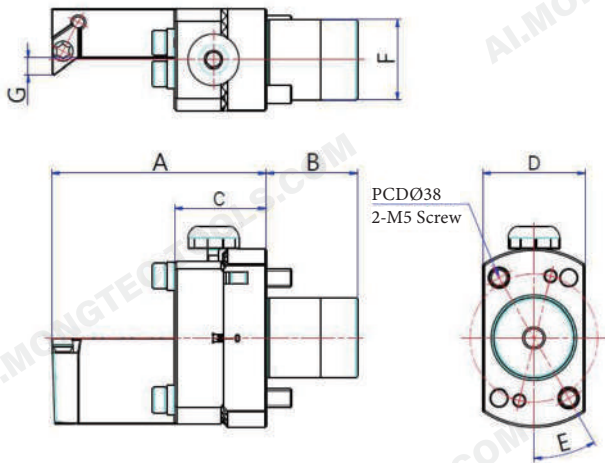




Turning Tool Holder

Model	L20-51510	CINCOM Part No.	
Gear Ratio	-	Max. Speed	-
Vertical Adjustment	±1.0 mm		
Turning Insert	MITSUBISHI (DCM11T302)		
Compatible Machines	L20		

Model	A	B	C	D	E	F	G
L20-51510	58.69	25	25.1	28	30°	Ø 22	4.61

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.




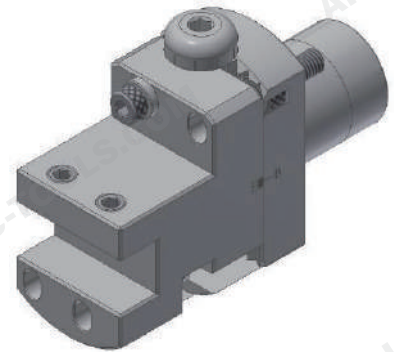

PCDØ38
2-M5 Screw


Turning Tool Holder

Model	L20-51510-1	CINCOM Part No.	
Gear Ratio	-	Max. Speed	-
Vertical Adjustment	±1.0 mm		
Tool Shank Size	10 mm		
Compatible Machines	L20		

Model	A	B	C	D	E	F	G	H
L20-51510-1	49.9	25	24.9	28	30°	Ø 22	28	12.2

Unit: mm

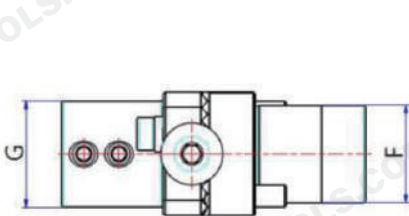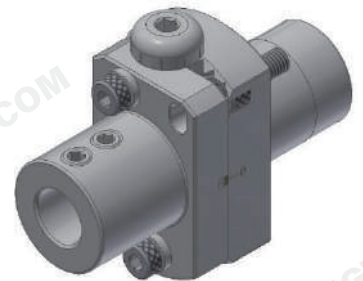
PCDØ38
2-M5 Screw


Turning Tool Holder





Model	L20-51510-2	CINCOM Part No.	
Gear Ratio	-	Max. Speed	-
Vertical Adjustment	±1.0 mm		
Shank Dia.	ØD		
Compatible Machines	L20		

Shank Dia. ØD		Set Screw	
Ø6		M6X10	
Ø8		M6X8	
Ø10		M6X8	
Ø12		ZLM0640060	

Model	A	B	C	D	E	F	G
L20-51510-2	43.9	25	20.9	28	30°	Ø 22	Ø 24

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

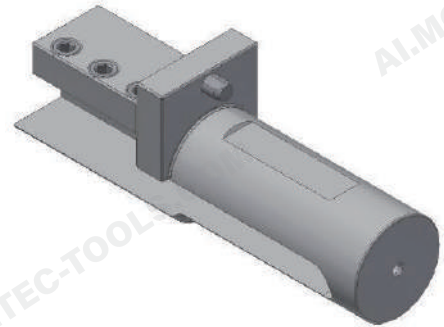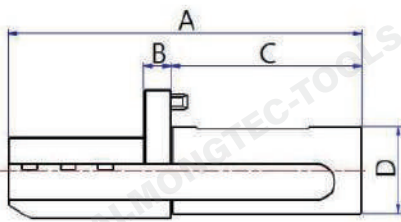
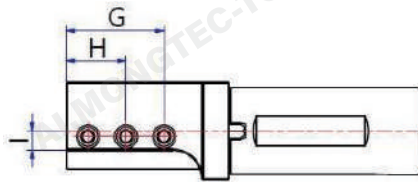


Turning Tool Holder

Model	L20-11510	CINCOM Part No.	
Gear Ratio	-	Max. Speed	-
Vertical Adjustment	-		
Shank Dia.	-		
Compatible Machines	L20		

Model	A	B	C	D	E	F	G	H	I
L20-11510	130	10	70	Ø 32	36	25	36	22	7

Unit: mm

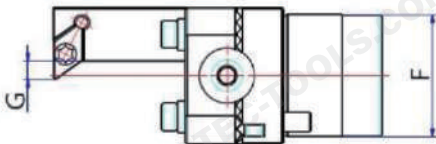

PCDØ47
2-M5 Screw







Turning Tool Holder

Model	L32-51510	CINCOM Part No.	
Gear Ratio	-	Max. Speed	-
Vertical Adjustment	±1.0 mm		
Turning Insert	MITSUBISHI (DCM11T302)		
Compatible Machines	L32		

Model	A	B	C	D	E	F	G
L32-51510	58.69	25	25.1	34.5	30°	Ø 31	4.61

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

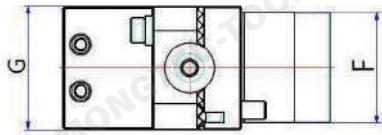
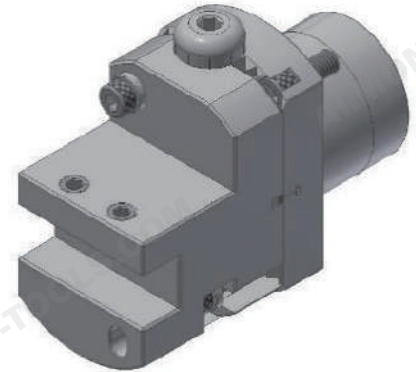


PCDØ47
2-M5 Screw


Turning Tool Holder

Model	L32-51510-1	CINCOM Part No.	
Gear Ratio	-	Max. Speed	-
Vertical Adjustment	±1.0 mm		
Turning Insert	MITSUBISHI (DCM11T302)		
Compatible Machines	L32		

Model	A	B	C	D	E	F	G	H
L32-51510-1	49.9	25	24.9	34.5	30°	Ø 31	34.5	12.2

Unit: mm

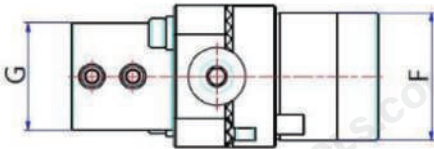
PCDØ47
2-M5 Screw


Turning Tool Holder



Model	L32-51510-2	CINCOM Part No.	-
Gear Ratio	-	Max. Speed	-
Vertical Adjustment	±1.0 mm		
Shank Dia.	ØD		
Compatible Machines	L32		

Shank Dia. ØD		Set Screw	
Ø6		M6X10	
Ø8		M6X8	
Ø10		M6X8	
Ø12		ZLM0640060	
Ø12		ZLM0640060	

Model	A	B	C	D	E	F	G
L32-51510-2	49.9	25	24.9	34.5	30°	Ø 31	Ø 26

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

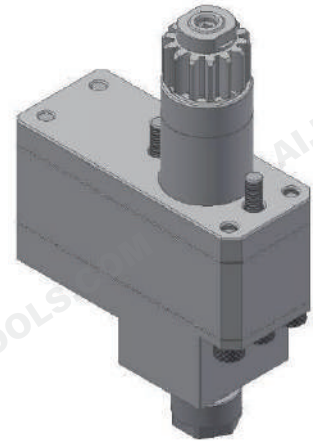
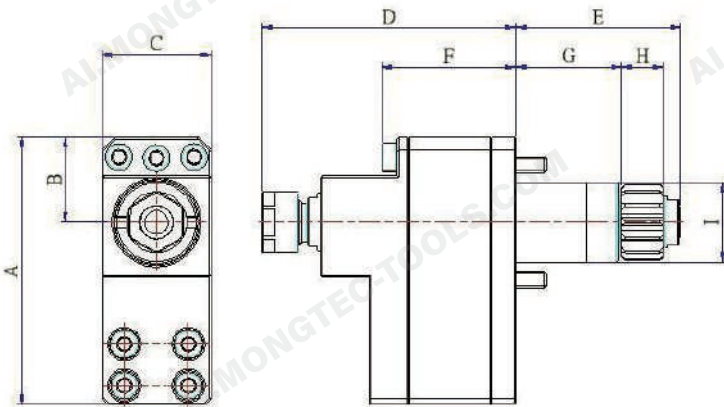


3x-Speed Backworking Live Tool Holder

Model	L20E-33310	CINCOM Part No.	-
Gear Ratio	1 / 3	Max. Speed	18000 rpm
Max. Collet Dia.	7 mm		
Collet	AR11-A, ER11-A		
Compatible Machines	A20VII(3F7)/A32VII(2M7)/L12VII(1M7)/ L20E(1M8/1M9)/L20X(1M10)/ L20XII(2M8/2M9/2M10/2M12)/M16(4M5/4M7/4M8)		

Model	A	B	C	D	E	F	G	H	I
L20E-33310	83.5	26.5	34	79.3	51.5	42	33	13	Ø 25

Unit: mm

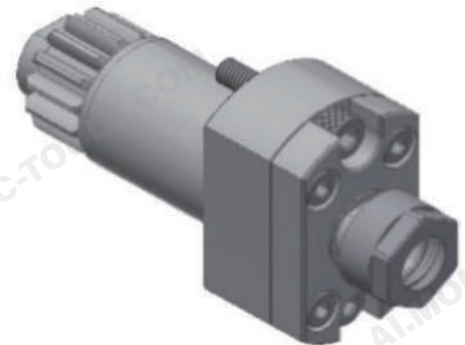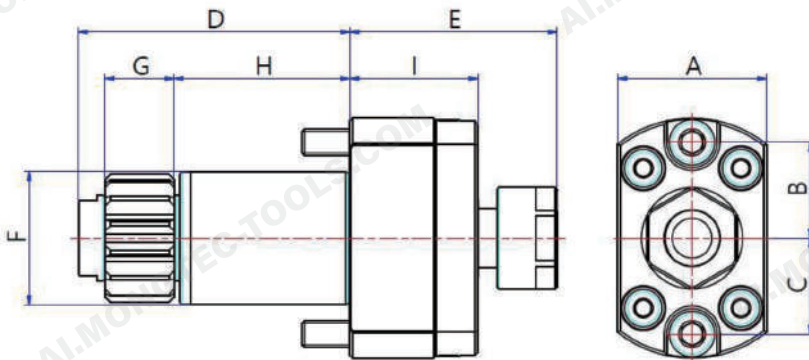


Backworking Live Tool Holder

Model	L20E-30310	CINCOM Part No.	GSE3307 MSC507
Gear Ratio	1 / 1	Max. Speed	10000 rpm
Max. Collet Dia.	7 mm		
Collet	AR11-A, ER11-A		
Compatible Machines	A20VII(3F7)/A32VII(2M7)/L12VII(1M7) L20E(1M8/1M9)/L20X(1M10)/ L20XII(2M8/2M9/2M10/2M12)/M16(4M5/4M7/4M8)		

Model	A	B	C	D	E	F	G	H	I
L20E-30310	28	18	18	51	39	Ø 25	13	33	24.1

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

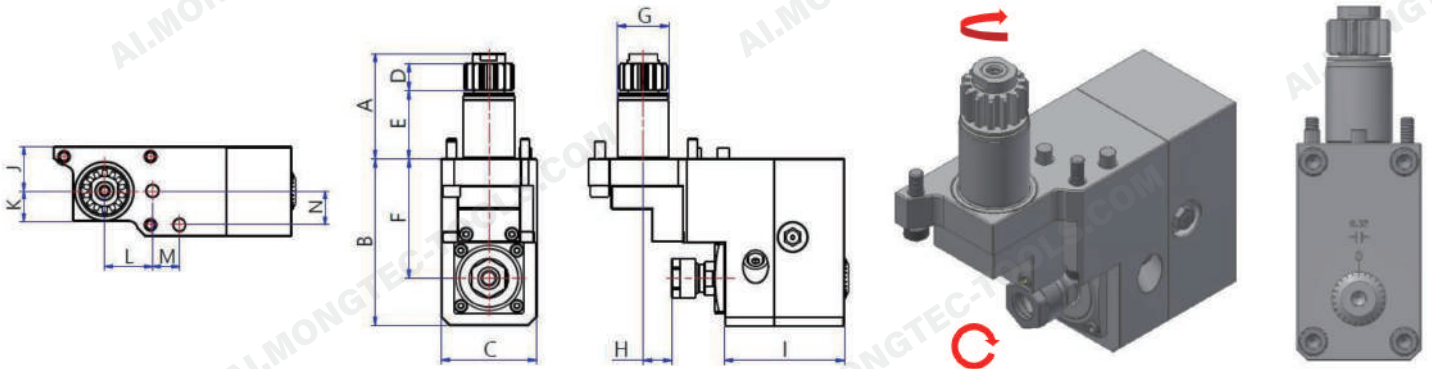


Backworking Radial Milling Holder

Model	GSS1530-30210	CINCOM Part No.	GSS1330 GSS1530
Gear Ratio	1 / 0.9	Max. Speed	5000 rpm
Max. Collet Dia.	7 mm	Scale Adjustment (Div.)	0.02 mm
Spindle Adjustment	0~3 mm		
Collet	AR11-A, ER11-A		
Compatible Machines	A20VII(3F7)/A32VII(2M7)/L12VII(1M7)/ L20E(1M8/1M9)/L20X(1M10)/ L20XII(2M8/2M9/2M10/2M12)		

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N
GSS1530-30210	51	81	46.5	13	33	58	Ø 25	11~14	58	23.25	15.75	25	14	17.5

Unit: mm

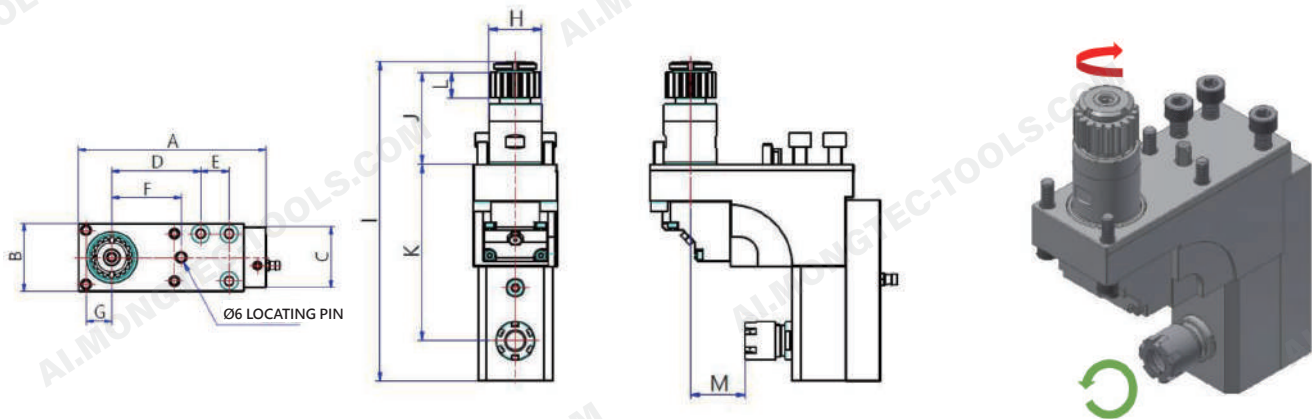


Backworking Radial Milling Holder

Model	L32-30210	CINCOM Part No.	GSE1910
Gear Ratio	1 / 1	Max. Speed	6000 rpm
Max. Collet Dia.	10 mm		
Collet	AR16-M, ER16-M		
Compatible Machines	L32(1M9/1M10)		

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
L32-30210	139.5	49	43.8	64	20.5	50	19.5	Ø 31	186	52.5	104	15	26.8

Unit: mm

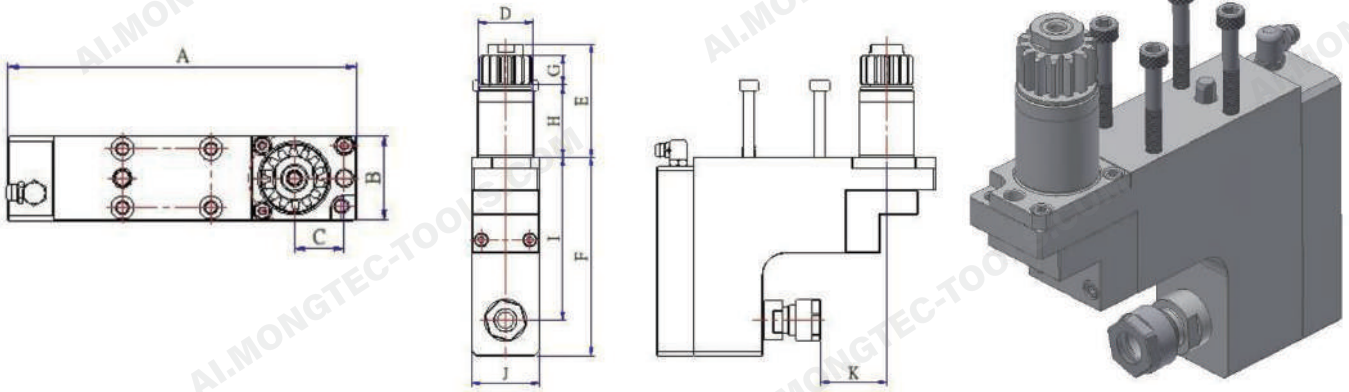


Backworking Radial Milling Holder

Model	GSC1507-30210	CINCOM Part No.	
Gear Ratio	1 / 1 Max. Collet Dia.	Max. Speed	5000rpm
Collet	AR11-A, ER11-A		
Compatible Machines	GCS1507		

Model	A	B	C	D	E	F	G	H	I	J	K
GSC1507-30210	125.4	30.3	18	Ø25	50.7	89	13	32.7	73	30.5	29.5

Unit: mm

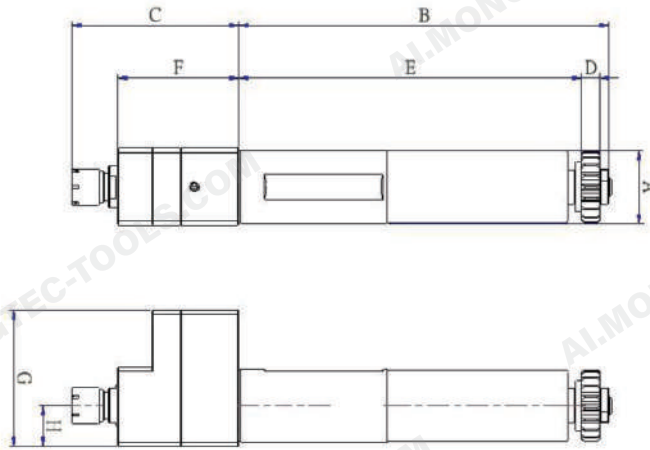



3x-Speed Backworking Live Tool Holder

Model	L20VII-13310	CINCOM Part No.	
Gear Ratio	1 / 3 Max. Collet Dia.	Max. Speed	18000rpm
Collet	AR11-M, ER11-M Compatible Machines		

Model	A	B	C	D	E	F	G	H
L20VII-13310	Ø32	162	73.2	8	150	53	60	18

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

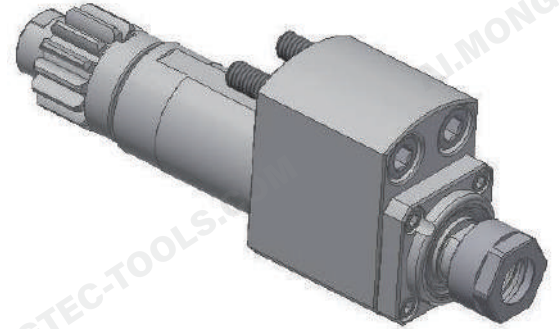
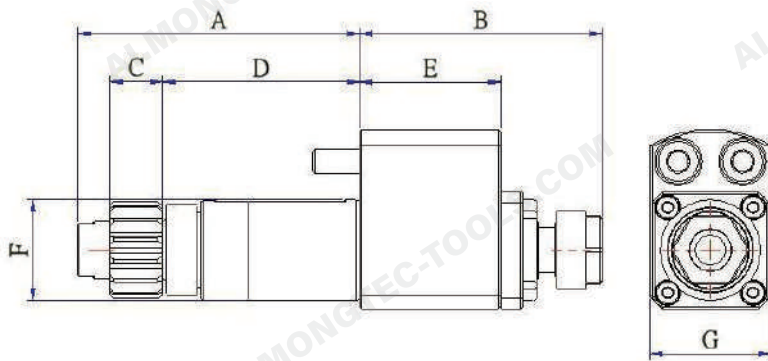


Radial Milling Spindle

Model	L20VII-10310-1	CINCOM Part No.	
Gear Ratio	Max. Collet Dia.	Max. Speed	6000rpm
Collet	AR11-A, ER11-A Compatible Machines		

Model	A	B	C	D	E	F	G
L20VII-10310-1	70	60.1	13	49	35	Ø25	30

Unit: mm

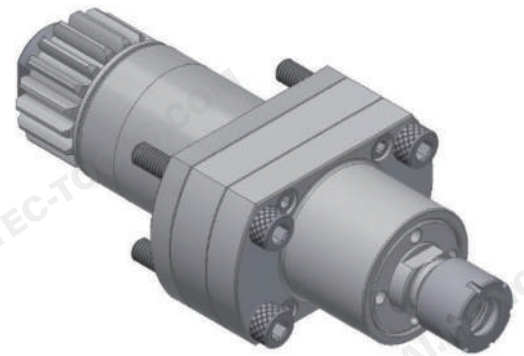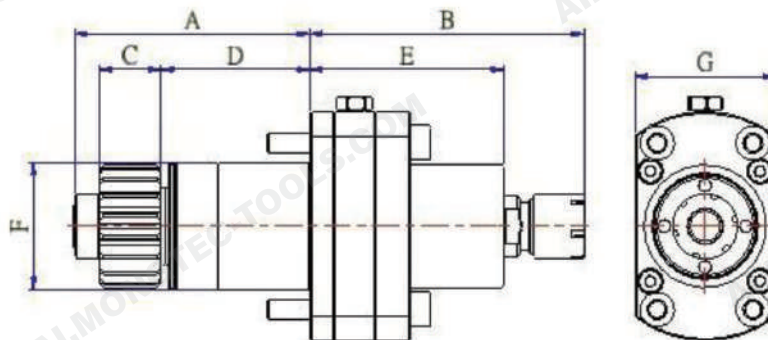


4x-Speed Straight-Shank Live Tool Holder

Model	GSC1310-24310	CINCOM Part No.	
Gear Ratio	1 / 4 Max. Collet Dia.	Max. Speed	40000rpm
Collet	AR11-M, ER11-M Compatible Machines		

Model	A	B	C	D	E	F	G
GSC1310-24310	57.5	67.2	15	36.5	47.5	Ø31	34.5

Unit: mm


Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

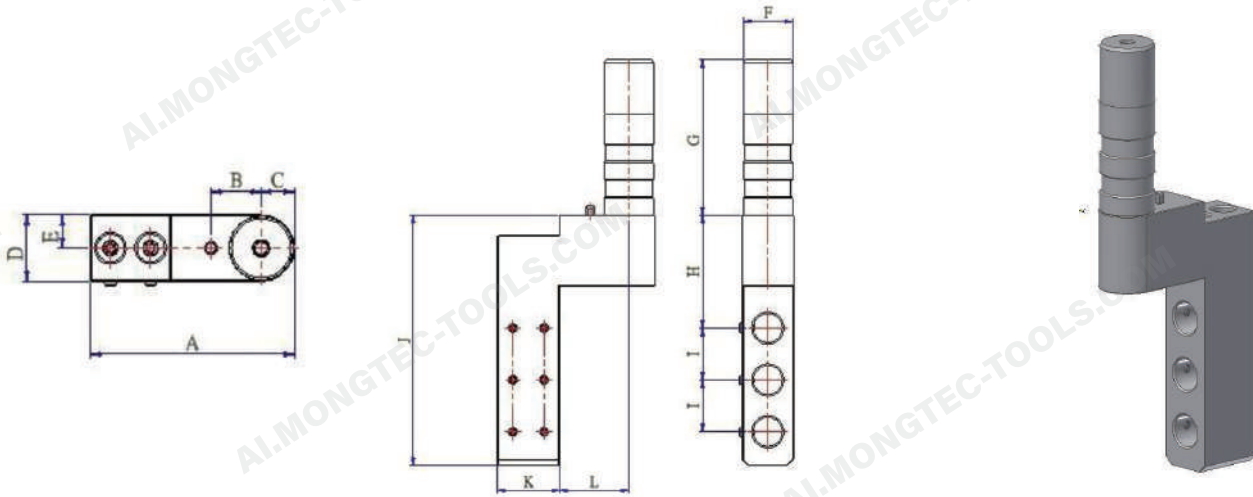

Drilling Holder			
Model	GTF3512-11030	CINCOM Part No.	
Gear Ratio	Max. Speed Max. Collet Dia. Collet		
Compatible Machines	L16/L20(L1620/L71620)		

Model	A	B	C	D	E	F	G	H	I	J	K	L
GTF3512-11030	101.5	25	16.5	33	16.5	Ø32	100	73	33.5	162	40	45







Unit: mm

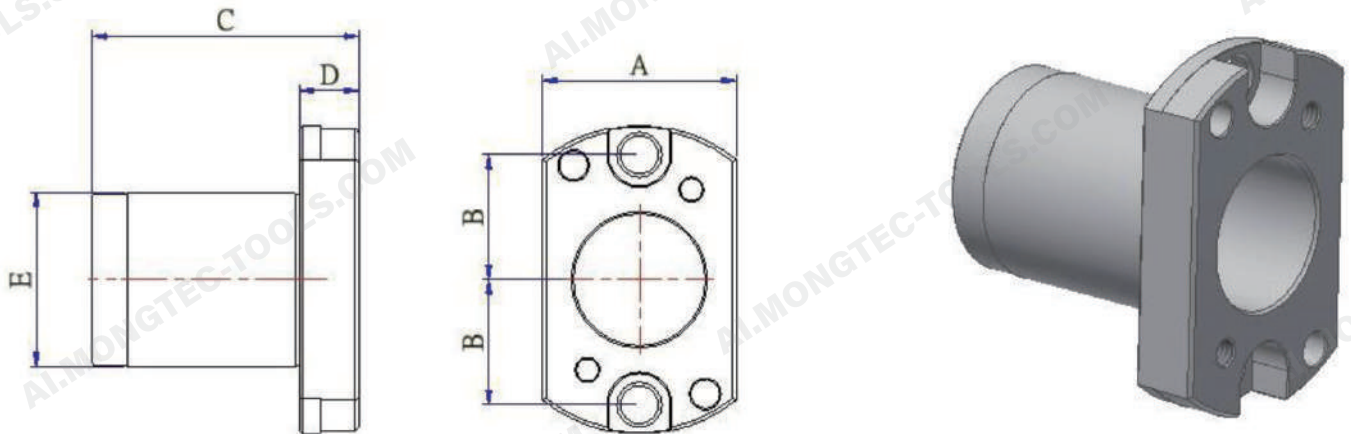

Side-Lock Tool Holder			
Model	SAU819-31310	CINCOM Part No.	
Gear Ratio			
Max. Collet Dia.	Collet	Bore Dia.	Ø19.05mm
Compatible Machines			

Model	A	B	C	D	E
SAU819-31310	28	18	38.5	8.5	Ø25

Unit: mm

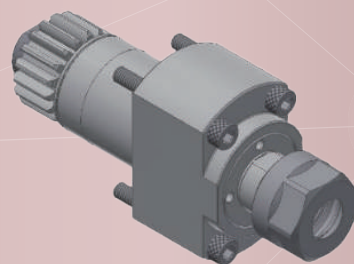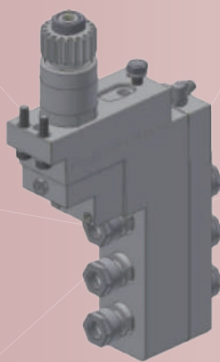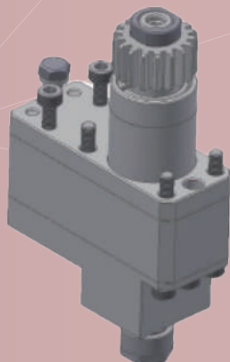

Facebook



WeChat



YouTube



Mongtec Web



LINE



WhatsApp



Mongtec Precision Inc.

TEL : +886-4-22653360

FAX : +886-4-22653386

E-mail : info@mongtec.com

No. 87, Sec. 1, Daqing St., South Dist., Taichung City 402024, Taiwan (R.O.C.)