

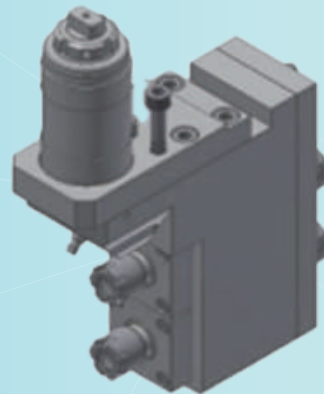
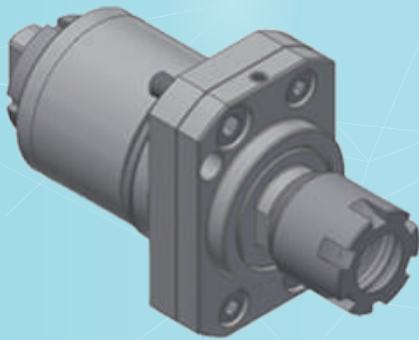




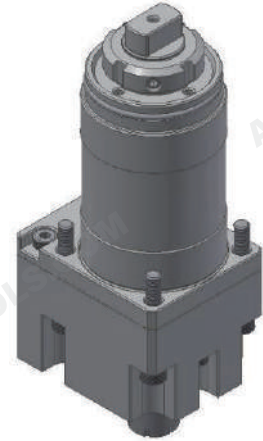

# TSUGAMI



## Swiss Type Toolholders

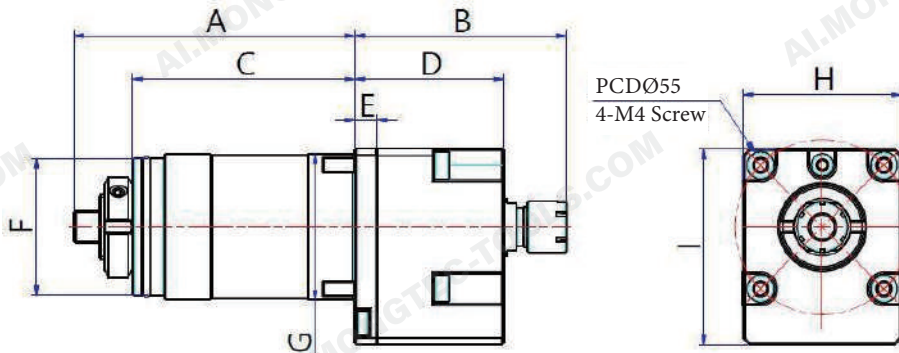

### 3x-Speed Live Tool Holder

|                     |                                                                                  |                  |           |    |   |     |     |    |      |
|---------------------|----------------------------------------------------------------------------------|------------------|-----------|----|---|-----|-----|----|------|
| Model               | B0385-23310                                                                      | TSUGAMI Part No. | 3290-Y670 |    |   |     |     |    |      |
| Gear Ratio          | 1 / 3                                                                            | Max. Speed       | 18000 rpm |    |   |     |     |    |      |
| Max. Collet Dia.    | 7 mm                                                                             |                  |           |    |   |     |     |    |      |
| Collet              | Main Spindle: AR11-M, ER11-M                                                     |                  |           |    |   |     |     |    |      |
| Compatible Machines | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L/SS20/SS32 |                  |           |    |   |     |     |    |      |
| Model               | A                                                                                | B                | C         | D  | E | F   | G   | H  | I    |
| B0385-23310         | 88.5                                                                             | 66.7             | 70        | 47 | 7 | Ø43 | Ø46 | 50 | 61.5 |


Unit: mm

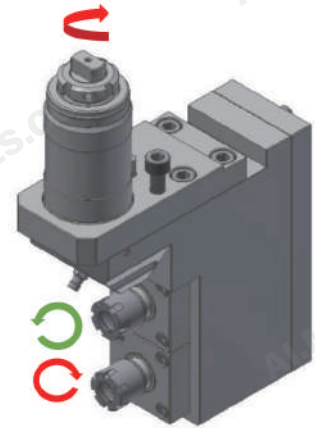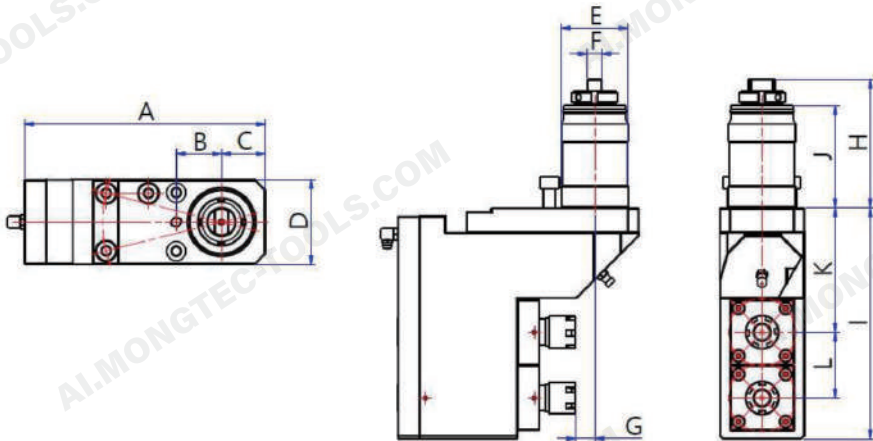

### Axial Live Tool Holder


|                     |                                                                                  |    |    |    |     |                  |    |           |     |    |    |    |
|---------------------|----------------------------------------------------------------------------------|----|----|----|-----|------------------|----|-----------|-----|----|----|----|
| Model               | B0385-20120                                                                      |    |    |    |     | TSUGAMI Part No. |    | 3268-Y241 |     |    |    |    |
| Gear Ratio          | 1 / 1                                                                            |    |    |    |     | Max. Speed       |    | 6000 rpm  |     |    |    |    |
| Max. Collet Dia.    | 10mm                                                                             |    |    |    |     |                  |    |           |     |    |    |    |
| Collet              | Main Spindle: AR16-M, ER16-M                                                     |    |    |    |     |                  |    |           |     |    |    |    |
| Compatible Machines | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L/SS20/SS32 |    |    |    |     |                  |    |           |     |    |    |    |
| Model               | A                                                                                | B  | C  | D  | E   | F                | G  | H         | I   | J  | K  | L  |
| B0385-20120         | 164                                                                              | 31 | 29 | 58 | Ø46 | 10               | 13 | 88        | 158 | 70 | 85 | 45 |

Unit: mm

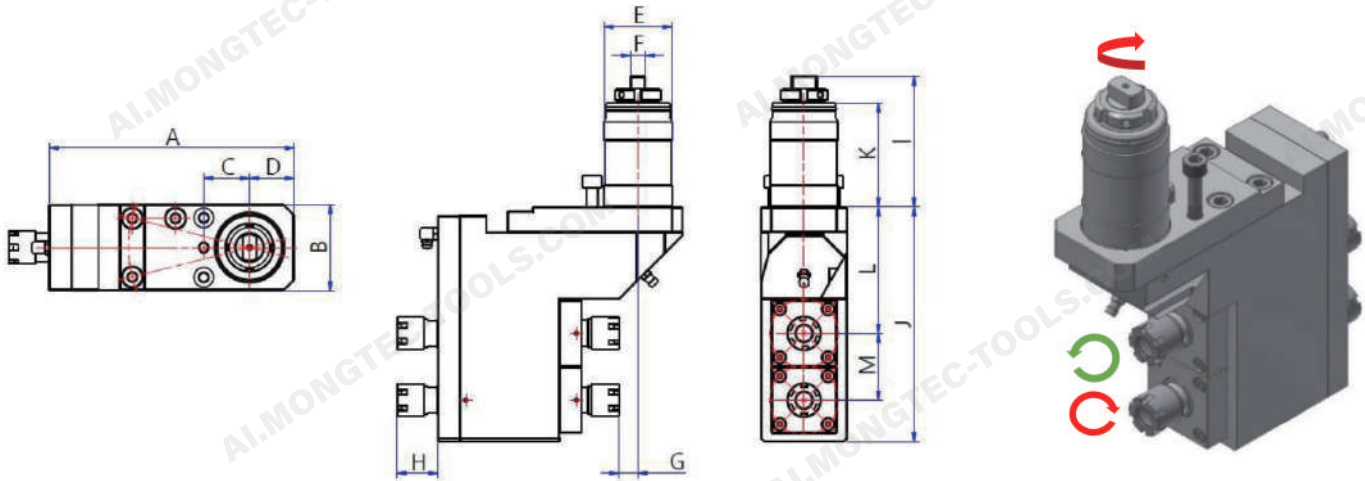

| Axial Live Tool Holder |                                                                        |    |    |    |     |                  |    |           |    |     |    |    |    |
|------------------------|------------------------------------------------------------------------|----|----|----|-----|------------------|----|-----------|----|-----|----|----|----|
| Model                  | B0385-21120                                                            |    |    |    |     | TSUGAMI Part No. |    | 3282-Y901 |    |     |    |    |    |
| Gear Ratio             | 1 / 1                                                                  |    |    |    |     | Max. Speed       |    | 6000 rpm  |    |     |    |    |    |
| Max. Collet Dia.       | 10mm /10mm                                                             |    |    |    |     |                  |    |           |    |     |    |    |    |
| Collet                 | Main Spindle: AR16-M, ER16-M<br>Sub Spindle: AR16-M, ER16-M            |    |    |    |     |                  |    |           |    |     |    |    |    |
| Compatible Machines    | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L |    |    |    |     |                  |    |           |    |     |    |    |    |
| Model                  | A                                                                      | B  | C  | D  | E   | F                | G  | H         | I  | J   | K  | L  | M  |
| B0385-21120            | 164                                                                    | 58 | 31 | 29 | Ø46 | 10               | 13 | 27.5      | 88 | 158 | 70 | 85 | 45 |


Unit: mm

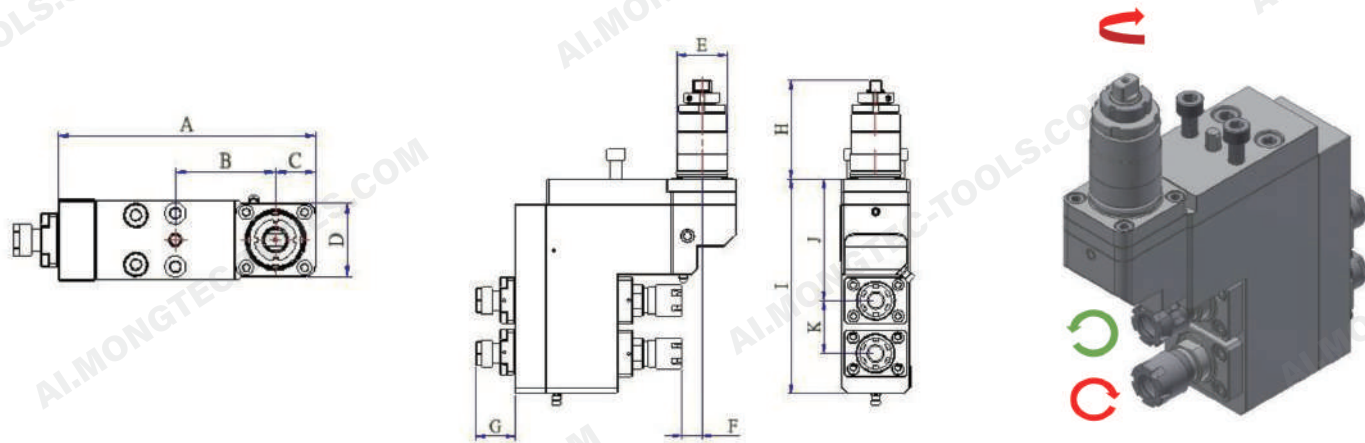

| Axial Live Tool Holder |                                                                        |      |    |    |     |                  |      |          |     |    |    |
|------------------------|------------------------------------------------------------------------|------|----|----|-----|------------------|------|----------|-----|----|----|
| Model                  | S206-21120                                                             |      |    |    |     | TSUGAMI Part No. |      |          |     |    |    |
| Gear Ratio             | 1 / 1                                                                  |      |    |    |     | Max. Speed       |      | 6000 rpm |     |    |    |
| Max. Collet Dia.       | -                                                                      |      |    |    |     | -                |      | -        |     |    |    |
| Collet                 | Main Spindle: AR16-M, ER16-M<br>Sub Spindle: AR11-M, ER11M             |      |    |    |     |                  |      |          |     |    |    |
| Compatible Machines    | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L |      |    |    |     |                  |      |          |     |    |    |
| Model                  | A                                                                      | B    | C  | D  | E   | F                | G    | H        | I   | J  | K  |
| S206-21120             | 154.5                                                                  | 44.2 | 60 | 24 | Ø35 | 14.5             | 26.6 | 68.8     | 150 | 84 | 36 |

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

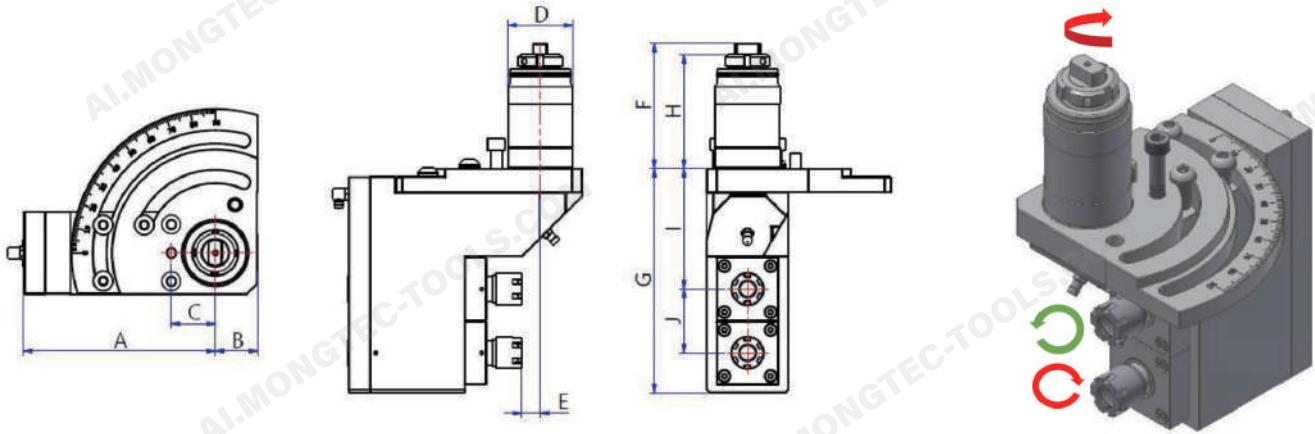


### Adjustable-Angle Axial Live Tool Holder

|                            |                                                                                  |                         |           |
|----------------------------|----------------------------------------------------------------------------------|-------------------------|-----------|
| <b>Model</b>               | B0385-25020                                                                      | <b>TSUGAMI Part No.</b> | 3268-Y281 |
| <b>Gear Ratio</b>          | 1 / 1                                                                            | <b>Max. Speed</b>       | 6000 rpm  |
| <b>Max. Collet Dia.</b>    | 10 mm                                                                            | <b>Angle Adjustment</b> | 0 ~ 90°   |
| <b>Collet</b>              | Main Spindle: AR16-M, ER16-M                                                     |                         |           |
| <b>Compatible Machines</b> | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L/SS20/SS32 |                         |           |

| Model       | A   | B  | C  | D   | E  | F  | G   | H  | I  | J  |
|-------------|-----|----|----|-----|----|----|-----|----|----|----|
| B0385-25020 | 135 | 29 | 31 | Ø46 | 13 | 88 | 158 | 80 | 85 | 45 |

Unit: mm

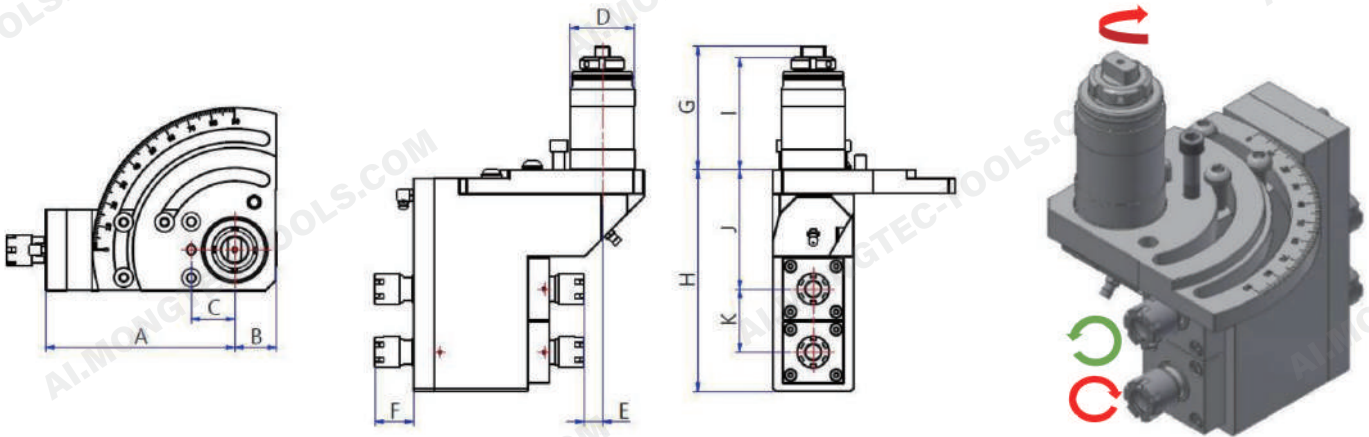




### Adjustable-Angle Axial Live Tool Holder

|                            |                                                                        |                         |           |
|----------------------------|------------------------------------------------------------------------|-------------------------|-----------|
| <b>Model</b>               | B0385-25120                                                            | <b>TSUGAMI Part No.</b> | 3282-Y921 |
| <b>Gear Ratio</b>          | 1 / 1                                                                  | <b>Max. Speed</b>       | 6000 rpm  |
| <b>Max. Collet Dia.</b>    | 10mm /10mm                                                             | <b>Angle Adjustment</b> | 0 ~ 90°   |
| <b>Collet</b>              | Main Spindle: AR16-M, ER16-M<br>Sub Spindle: AR16-M, ER16-M            |                         |           |
| <b>Compatible Machines</b> | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L |                         |           |

| Model       | A   | B  | C  | D   | E  | F    | G  | H   | I  | J  | K  |
|-------------|-----|----|----|-----|----|------|----|-----|----|----|----|
| B0385-25120 | 135 | 29 | 31 | Ø46 | 13 | 27.5 | 88 | 158 | 80 | 85 | 45 |

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

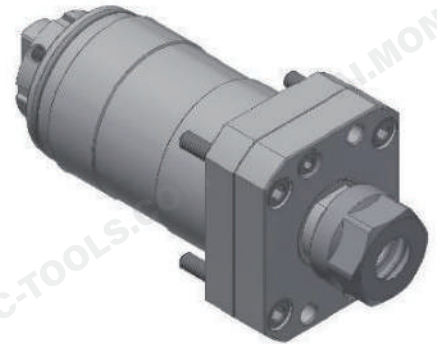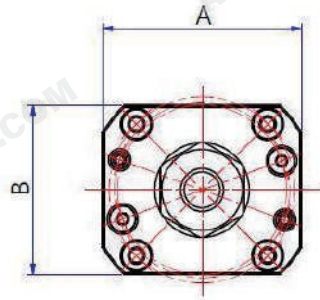
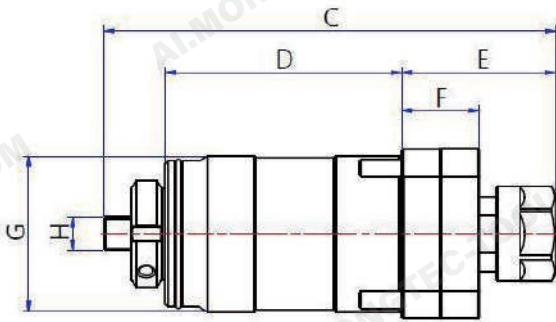


### Radial Milling Live Tool Holder

|                     |                                                                                  |                  |           |
|---------------------|----------------------------------------------------------------------------------|------------------|-----------|
| Model               | B0385-20310                                                                      | TSUGAMI Part No. | 3268-T051 |
| Gear Ratio          | 1 / 1                                                                            | Max. Speed       | 6000 rpm  |
| Max. Collet Dia.    | 10 mm                                                                            | Drilling Depth   | -         |
| Collet              | AR16-A, ER16-A                                                                   |                  |           |
| Compatible Machines | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L/SS20/SS32 |                  |           |

| Model       | A  | B  | C     | D  | E    | F  | G   | H  |
|-------------|----|----|-------|----|------|----|-----|----|
| B0385-20310 | 59 | 50 | 133.5 | 70 | 45.5 | 23 | Ø46 | 10 |

Unit: mm

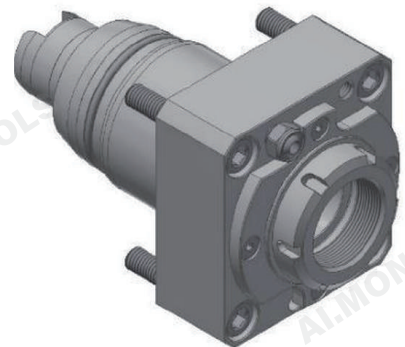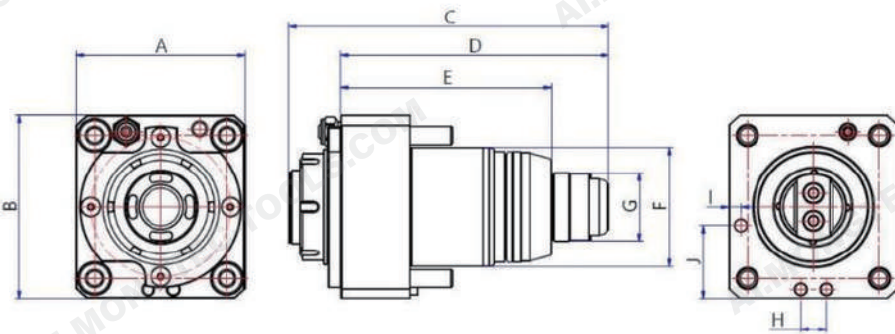



### Straight-Shank Live Tool Holder

|                     |                                   |                  |           |
|---------------------|-----------------------------------|------------------|-----------|
| Model               | M06-BMT65-001032                  | TSUGAMI Part No. | 3295-Y161 |
| Gear Ratio          | 1 / 1                             | Max. Speed       | 6000 rpm  |
| Max. Collet Dia.    | 16 mm                             |                  |           |
| Collet              | Collet Clamping Nut (ERA32)       |                  |           |
| Compatible Machines | M06D/M08D/M06SD/M08SD/M06SY/M08SY |                  |           |

| Model            | A  | B   | C     | D   | E   | F   | G   | H     | I   | J  |
|------------------|----|-----|-------|-----|-----|-----|-----|-------|-----|----|
| M06-BMT65-001032 | 92 | 100 | 174.5 | 146 | 115 | Ø65 | Ø37 | 13.96 | 6.5 | 40 |

Unit: mm


Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

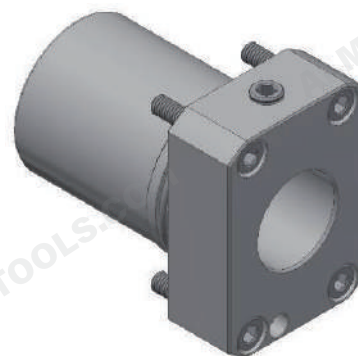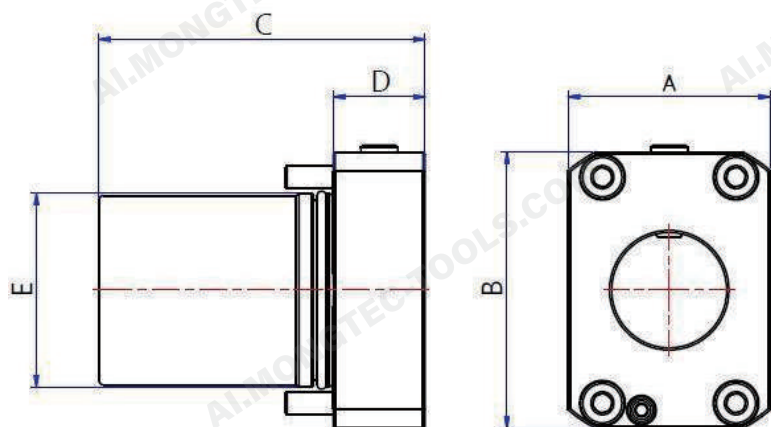

| Backworking Side-Lock Holder |                                                                                    |                  |           |
|------------------------------|------------------------------------------------------------------------------------|------------------|-----------|
| Model                        | B0385-31310                                                                        | TSUGAMI Part No. | 3282-Y211 |
| Gear Ratio                   | -                                                                                  | Max. Speed       | -         |
| Bore Dia.                    | Ø25                                                                                |                  |           |
| Compatible Machines          | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L/SS267/SS327 |                  |           |



| Model       | A  | B  | C  | D  | E   |
|-------------|----|----|----|----|-----|
| B0385-31310 | 44 | 60 | 71 | 20 | Ø42 |

Unit: mm

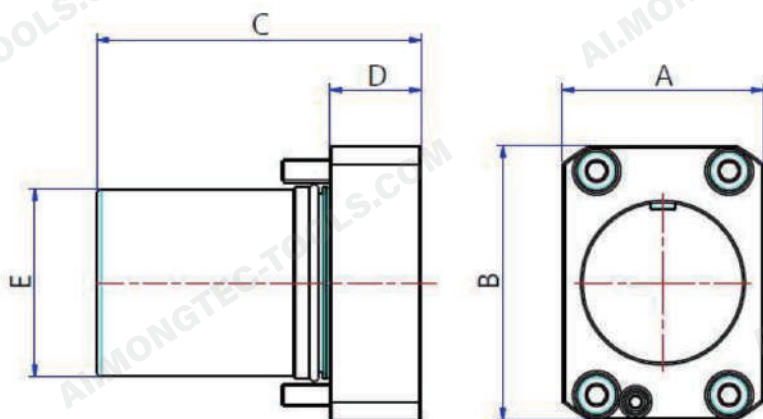

| Backworking Side-Lock Holder |                                                                                   |                  |           |    |     |
|------------------------------|-----------------------------------------------------------------------------------|------------------|-----------|----|-----|
| Model                        | B0385-31310-1                                                                     | TSUGAMI Part No. | 3282-Y212 |    |     |
| Gear Ratio                   | -                                                                                 | Max. Speed       | -         |    |     |
| Bore Dia.                    | Ø35                                                                               |                  |           |    |     |
| Compatible Machines          | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L/S267/SS327 |                  |           |    |     |
| Model                        | A                                                                                 | B                | C         | D  | E   |
| B0385-31310-1                | 44                                                                                | 60               | 71        | 20 | Ø41 |

Unit: mm

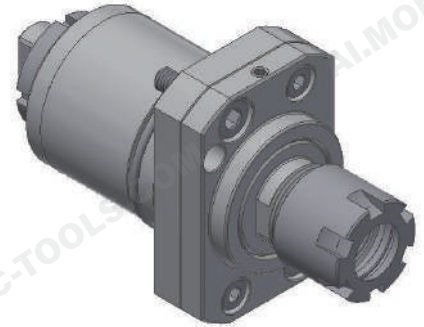
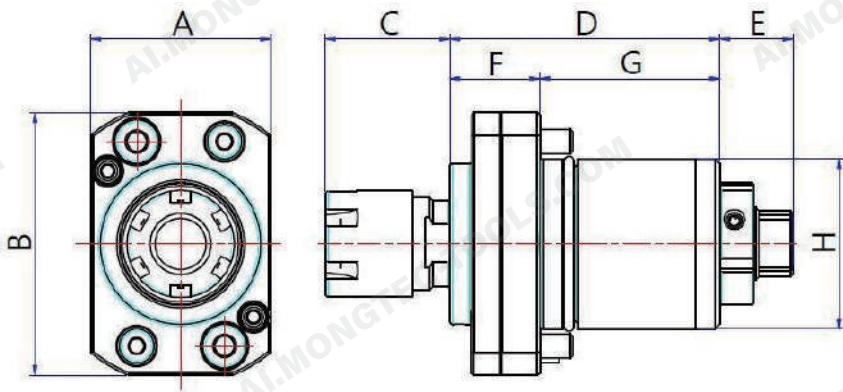


#### Backworking Live Tool Holder

|                            |                   |                         |            |
|----------------------------|-------------------|-------------------------|------------|
| <b>Model</b>               | B0205-30310       | <b>TSUGAMI Part No.</b> | 3220-Y7072 |
| <b>Gear Ratio</b>          | 1 / 1             | <b>Max. Speed</b>       | 8000 rpm   |
| <b>Max. Collet Dia.</b>    | 10 mm             |                         |            |
| <b>Collet</b>              | AR16-M, ER16-M    |                         |            |
| <b>Compatible Machines</b> | B0125III/B0205III |                         |            |

| Model       | A  | B  | C    | D    | E  | F    | G  | H   |
|-------------|----|----|------|------|----|------|----|-----|
| B0205-30310 | 37 | 54 | 25.5 | 55.5 | 15 | 18.5 | 37 | Ø35 |

Unit: mm

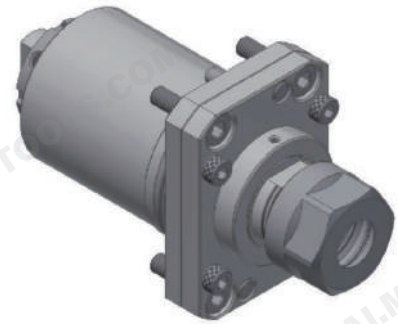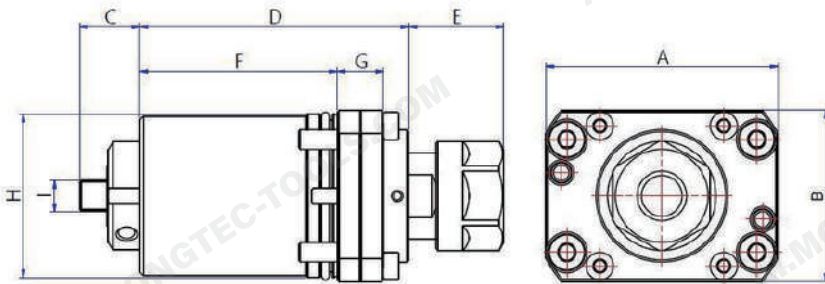




#### Backworking Live Tool Holder

|                            |                                                                                    |                         |           |
|----------------------------|------------------------------------------------------------------------------------|-------------------------|-----------|
| <b>Model</b>               | B0385-30310                                                                        | <b>TSUGAMI Part No.</b> | 3282-Y041 |
| <b>Gear Ratio</b>          | 1 / 1                                                                              | <b>Max. Speed</b>       | 6000 rpm  |
| <b>Max. Collet Dia.</b>    | 10 mm                                                                              |                         |           |
| <b>Collet</b>              | AR16-A, ER16-A                                                                     |                         |           |
| <b>Compatible Machines</b> | B0265/B0266/B0325/B0326/ B0265II/B0266II/B0325II/B0326II/ B0385/B0385L/SS267/SS327 |                         |           |

| Model       | A  | B  | C    | D    | E    | F  | G  | H   | I |
|-------------|----|----|------|------|------|----|----|-----|---|
| B0385-30310 | 60 | 44 | 15.5 | 69.5 | 24.5 | 51 | 12 | Ø42 | 8 |

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.


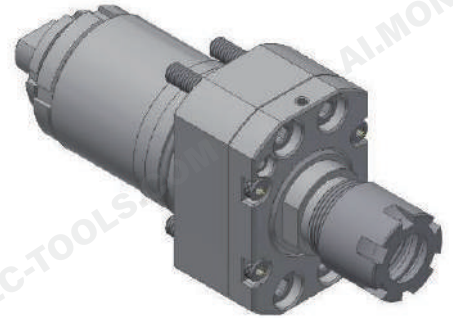

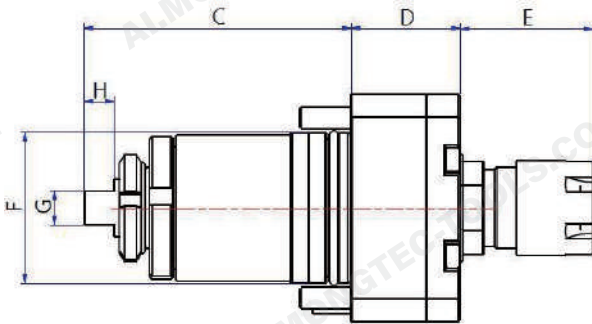


### Backworking Live Tool Holder

|                     |                      |                  |           |
|---------------------|----------------------|------------------|-----------|
| Model               | S206-30310           | TSUGAMI Part No. | 3281-S080 |
| Gear Ratio          | 1 / 1                | Max. Speed       | 8000 rpm  |
| Max. Collet Dia.    | 10 mm                |                  |           |
| Collet              | AR16-M, ER16-M       |                  |           |
| Compatible Machines | S205/S206/S207/SS207 |                  |           |

| Model      | A  | B  | C    | D    | E  | F   | G   | H |
|------------|----|----|------|------|----|-----|-----|---|
| S206-30310 | 37 | 53 | 62.3 | 25.5 | 31 | Ø35 | 7.9 | 7 |

Unit: mm

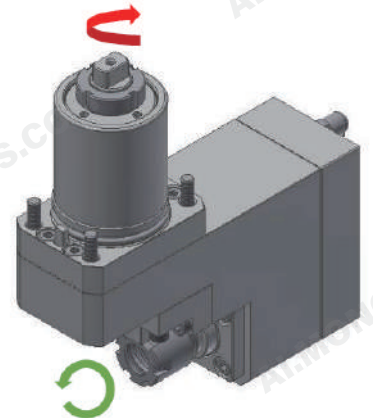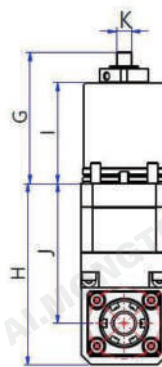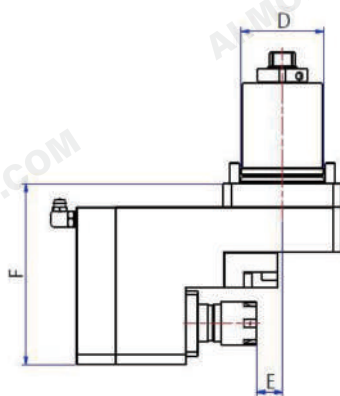


### Backworking Radial Milling Holder

|                     |                             |                  |           |
|---------------------|-----------------------------|------------------|-----------|
| Model               | B0385-30210                 | TSUGAMI Part No. | 3290-Y041 |
| Gear Ratio          | 1 / 1                       | Max. Speed       | 6000 rpm  |
| Max. Collet Dia.    | 10 mm                       |                  |           |
| Collet              | AR16-M, ER16-M              |                  |           |
| Compatible Machines | B0266/B0326/B0266II/B0326II |                  |           |

| Model       | A  | B  | C    | D   | E  | F  | G    | H  | I  | J  | K |
|-------------|----|----|------|-----|----|----|------|----|----|----|---|
| B0385-30210 | 60 | 44 | 25.5 | Ø42 | 13 | 92 | 66.5 | 92 | 51 | 71 | 8 |

Unit: mm

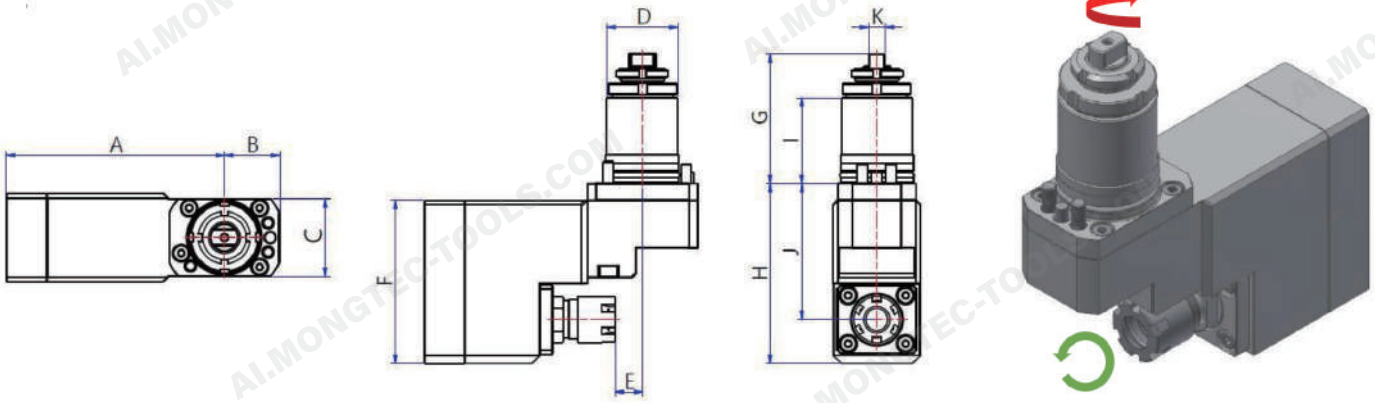


### Backworking Radial Milling Holder

|                            |                 |                         |           |
|----------------------------|-----------------|-------------------------|-----------|
| <b>Model</b>               | S206-30210      | <b>TSUGAMI Part No.</b> | 3281-Y460 |
| <b>Gear Ratio</b>          | 1 / 1           | <b>Max. Speed</b>       | 6000 rpm  |
| <b>Max. Collet Dia.</b>    | 10 mm           |                         |           |
| <b>Collet</b>              | AR16-M, ER16-M  |                         |           |
| <b>Compatible Machines</b> | S206/S207/SS207 |                         |           |

| Model      | A     | B    | C  | D   | E  | F  | G  | H  | I  | J  | K |
|------------|-------|------|----|-----|----|----|----|----|----|----|---|
| S206-30210 | 104.5 | 26.5 | 37 | Ø35 | 13 | 78 | 62 | 86 | 41 | 65 | 8 |

Unit: mm

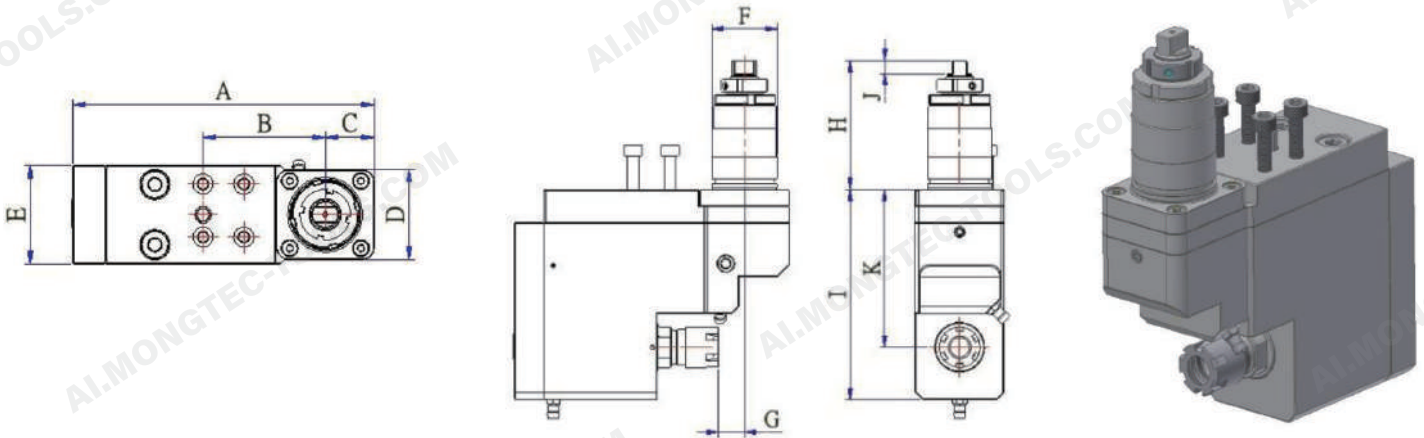


### Axial Live Tool Holder

|                   |                                                                 |                         |  |
|-------------------|-----------------------------------------------------------------|-------------------------|--|
| <b>Model</b>      | B0205-20110                                                     | <b>TSUGAMI Part No.</b> |  |
| <b>Gear Ratio</b> | Max. Speed<br>Max. Collet Dia.<br>Collet<br>Compatible Machines |                         |  |

| Model       | A | B | C | D | E | F | G | H | I | J | K |
|-------------|---|---|---|---|---|---|---|---|---|---|---|
| B0205-20110 |   |   |   |   |   |   |   |   |   |   |   |

Unit: mm

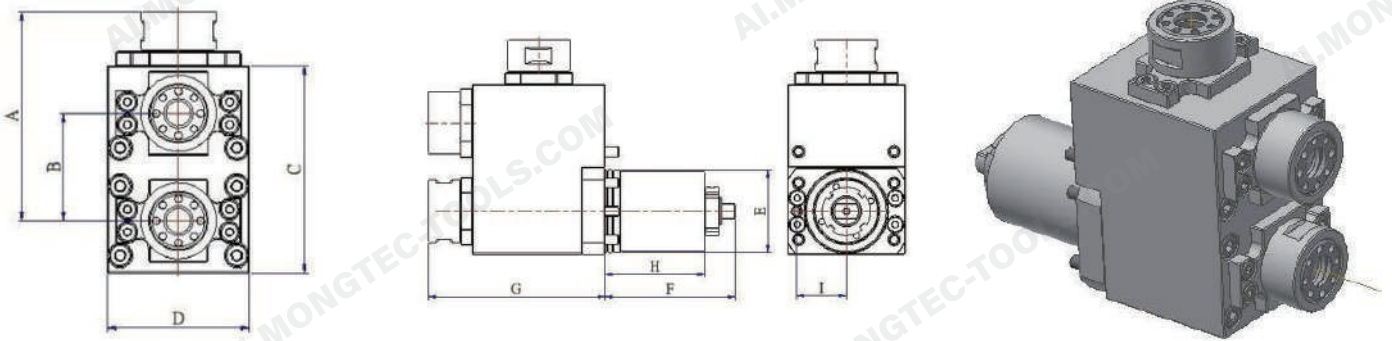


### Backworking Live Tool Holder

|                            |                                       |                         |         |
|----------------------------|---------------------------------------|-------------------------|---------|
| <b>Model</b>               | B0325-30030                           | <b>TSUGAMI Part No.</b> |         |
| <b>Gear Ratio</b>          | 1 / 1<br>Max. Collet Dia.             | <b>Max. Speed</b>       | 6000rpm |
| <b>Collet</b>              | ER16                                  |                         |         |
| <b>Compatible Machines</b> | B0265II / B0266II / B0325II / B0326II |                         |         |

| Model       | A    | B  | C  | D  | E   | F    | G    | H  | I    |
|-------------|------|----|----|----|-----|------|------|----|------|
| B0325-30030 | 87.5 | 45 | 87 | 60 | Ø42 | 66.5 | 90.5 | 51 | 25.5 |

Unit: mm

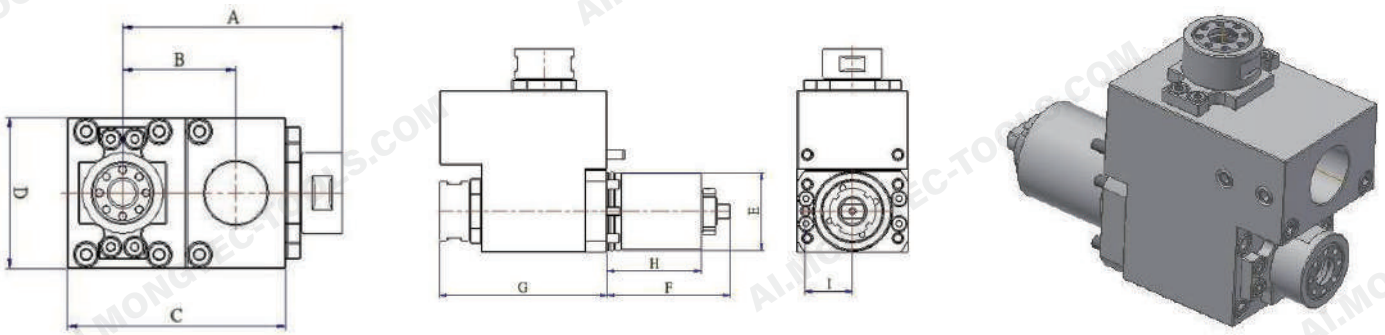


### Backworking Live Tool Holder

|                            |                                       |                         |         |
|----------------------------|---------------------------------------|-------------------------|---------|
| <b>Model</b>               | B0325-30030-1                         | <b>TSUGAMI Part No.</b> |         |
| <b>Gear Ratio</b>          | 1 / 1<br>Max. Collet Dia.             | <b>Max. Speed</b>       | 6000rpm |
| <b>Collet</b>              | ER16                                  |                         |         |
| <b>Compatible Machines</b> | B0265II / B0266II / B0325II / B0326II |                         |         |

| Model         | A    | B  | C  | D  | E   | F    | G    | H  | I    |
|---------------|------|----|----|----|-----|------|------|----|------|
| B0325-30030-1 | 87.5 | 45 | 87 | 60 | Ø42 | 66.5 | 90.5 | 51 | 25.5 |

Unit: mm

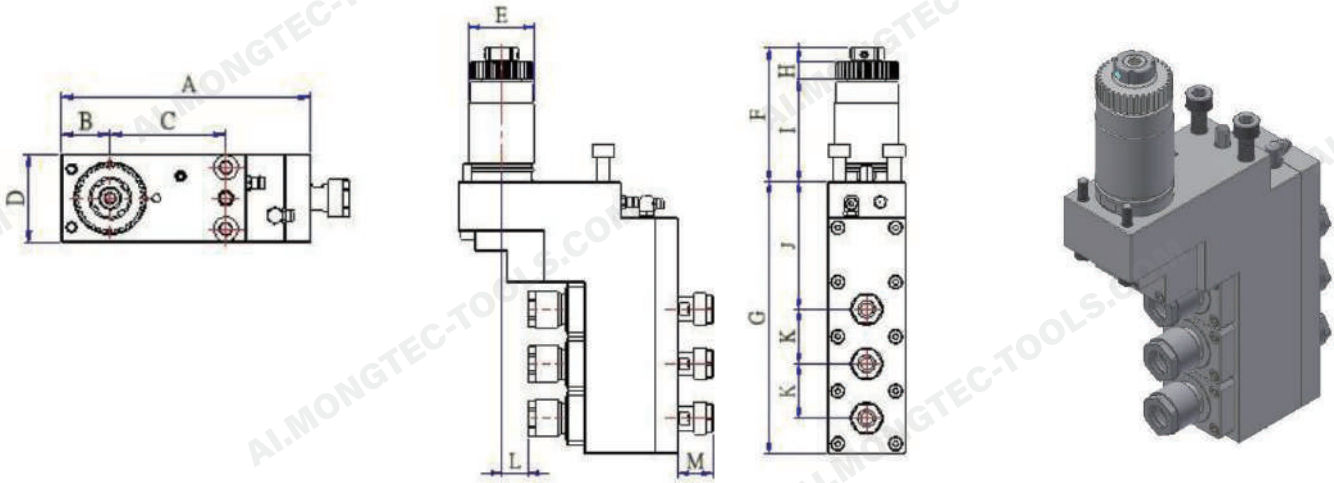


### Axial Live Tool Holder

|                            |                                                            |                         |          |
|----------------------------|------------------------------------------------------------|-------------------------|----------|
| <b>Model</b>               | S205A-21130                                                | <b>TSUGAMI Part No.</b> |          |
| <b>Gear Ratio</b>          | 1 / 1                                                      | <b>Max. Speed</b>       | 6000 rpm |
| <b>Max. Collet Dia.</b>    | -                                                          |                         | -        |
| <b>Collet</b>              | Main Spindle: AR16-M, ER16-M<br>Sub Spindle: AR11-M, ER11M |                         |          |
| <b>Compatible Machines</b> | S205A/S206                                                 |                         |          |

| Model       | A     | B    | C  | D  | E   | F    | G   | H  | I  | J  | K  | L     | M    |
|-------------|-------|------|----|----|-----|------|-----|----|----|----|----|-------|------|
| S205A-21130 | 129.5 | 25.5 | 60 | 46 | Ø38 | 78.5 | 160 | 10 | 60 | 75 | 32 | 15.76 | 20.3 |

Unit: mm

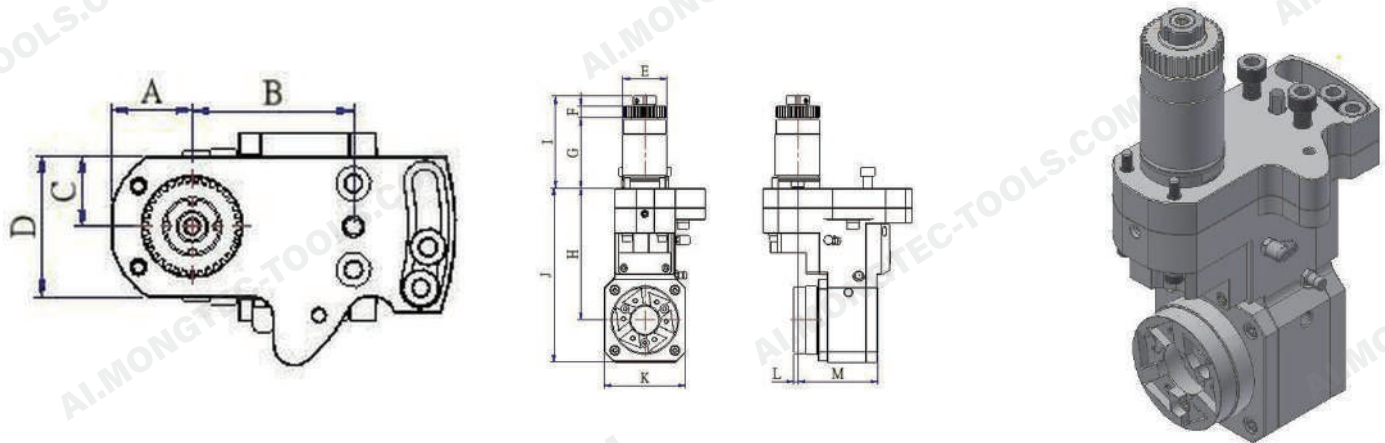




### Whirling Tool Holder

|                                 |                               |                         |       |
|---------------------------------|-------------------------------|-------------------------|-------|
| <b>Model</b>                    | S205A-20510                   | <b>TSUGAMI Part No.</b> |       |
| <b>Gear Ratio</b>               | 1 / 1                         | <b>Max. Speed</b>       |       |
| <b>Insert Holder Adjustment</b> | Cutter<br>Compatible Machines | <b>Angle Range</b>      | 0~15° |

| Model       | A  | B  | C  | D  | E   | F  | G  | H   | I    | K     | L    | M  |
|-------------|----|----|----|----|-----|----|----|-----|------|-------|------|----|
| S205A-20510 | 30 | 60 | 26 | 52 | Ø38 | 10 | 60 | 113 | 78.5 | 148.5 | 3.35 | 69 |

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

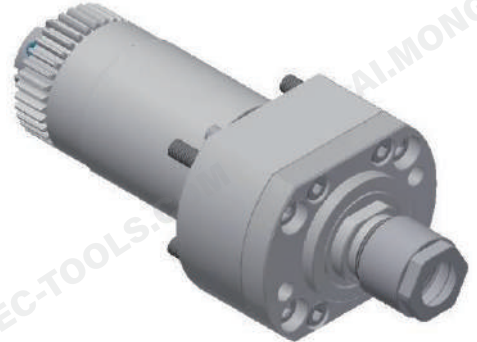
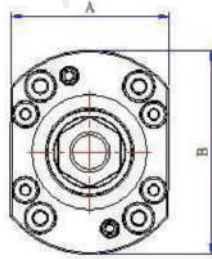
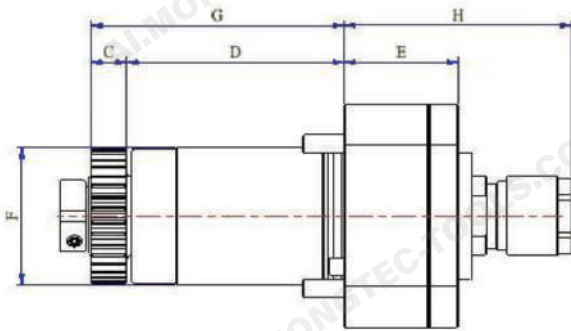


### Straight-Shank Live Tool Holder

|                            |                                |                         |  |
|----------------------------|--------------------------------|-------------------------|--|
| <b>Model</b>               | S205A-20310                    | <b>TSUGAMI Part No.</b> |  |
| <b>Gear Ratio</b>          | Max. Speed<br>Max. Collet Dia. |                         |  |
| <b>Collet</b>              | ER16-AM                        |                         |  |
| <b>Compatible Machines</b> | S205A/S206                     |                         |  |

| Model       | A  | B  | C  | D  | E     | F   | G  | H    |
|-------------|----|----|----|----|-------|-----|----|------|
| S205A-20310 | 48 | 62 | 10 | 60 | 31.75 | Ø38 | 70 | (63) |

Unit: mm

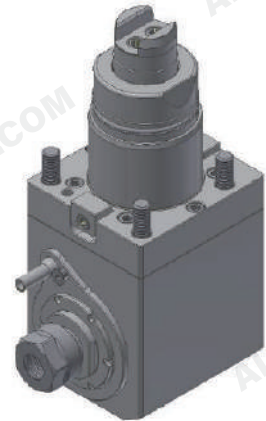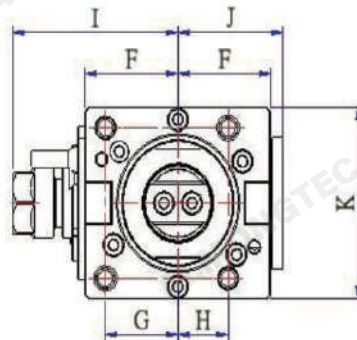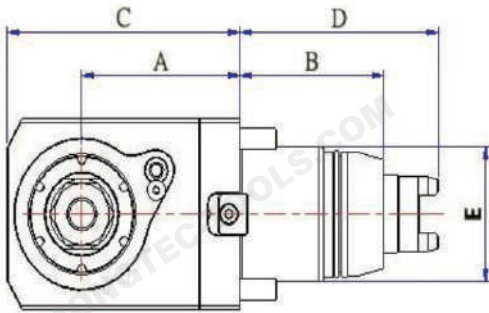



### Axial Live Tool Holder

|                            |                           |                         |         |
|----------------------------|---------------------------|-------------------------|---------|
| <b>Model</b>               | M06-650110200             | <b>TSUGAMI Part No.</b> |         |
| <b>Gear Ratio</b>          | 1 / 1<br>Max. Collet Dia. | <b>Max. Speed</b>       | 6000rpm |
| <b>Collet</b>              | ER20-A                    |                         |         |
| <b>Compatible Machines</b> | M06                       |                         |         |

| Model         | A  | B  | C   | D     | E   | F  | G  | H  | I  | J    | K  |
|---------------|----|----|-----|-------|-----|----|----|----|----|------|----|
| M06-650110200 | 85 | 77 | 125 | 106.5 | Ø65 | 50 | 39 | 27 | 89 | 56.6 | 92 |

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

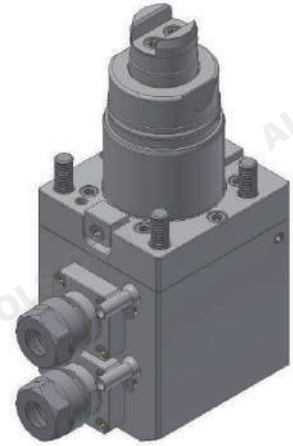
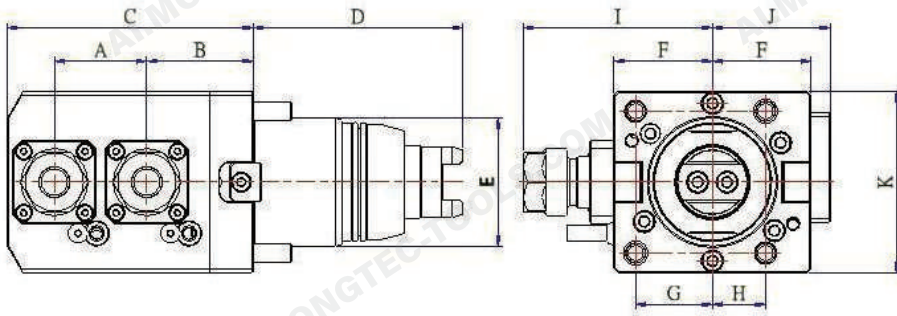


### Dual-Spindle Axial Live Tool Holder

|                     |              |                  |         |
|---------------------|--------------|------------------|---------|
| Model               | M06-65012020 | TSUGAMI Part No. |         |
| Gear Ratio          | 1 / 1        | Max. Speed       | 6000rpm |
| Collet              | ER20-A       |                  |         |
| Compatible Machines | M06          |                  |         |

| Model        | A  | B  | C   | D     | E   | F  | G  | H  | I    | J  | K  |
|--------------|----|----|-----|-------|-----|----|----|----|------|----|----|
| M06-65012020 | 47 | 54 | 125 | 106.5 | Ø65 | 50 | 39 | 27 | 96.1 | 60 | 92 |

Unit: mm

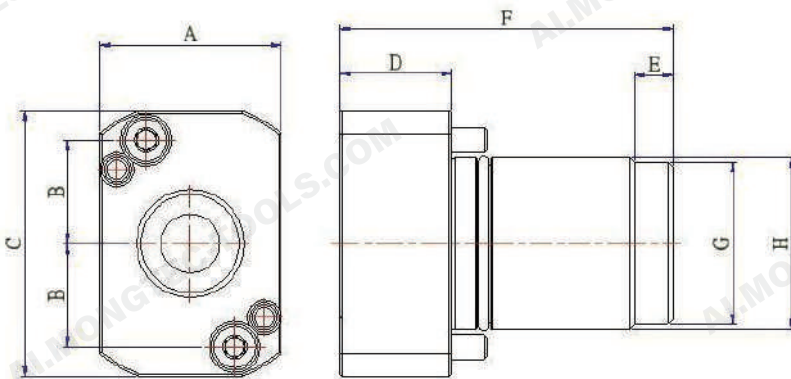



### Backworking Drilling Holder

|                     |             |                  |            |
|---------------------|-------------|------------------|------------|
| Model               | B0205-51310 | TSUGAMI Part No. | 3220-Y7073 |
| Gear Ratio          | Max. Speed  |                  |            |
| Bore Dia.           | Ø20mm       |                  |            |
| Compatible Machines | B0205       |                  |            |

| Model       | A  | B  | C  | D  | E | F  | G   | H   |
|-------------|----|----|----|----|---|----|-----|-----|
| B0205-51310 | 37 | 21 | 54 | 23 | 8 | 68 | Ø33 | Ø35 |

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

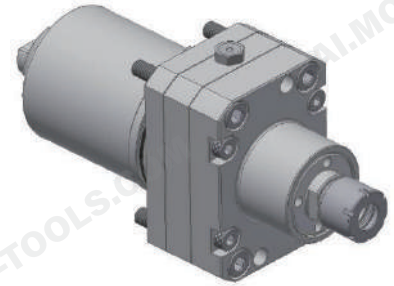
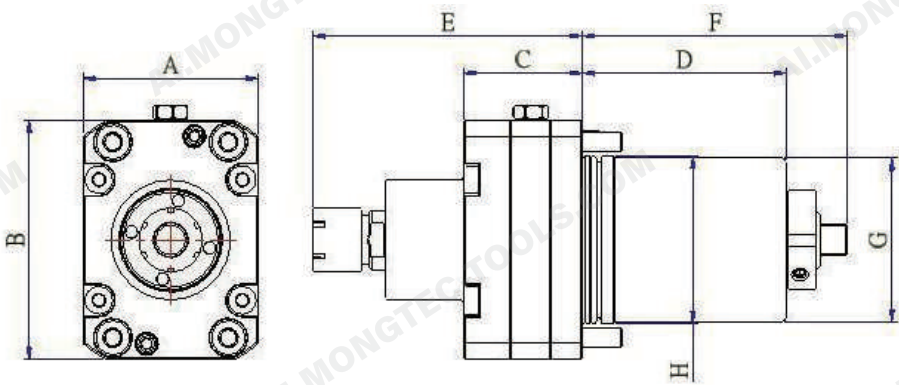


#### 4x-Speed Backworking Tool Holder

|                            |                           |                         |          |
|----------------------------|---------------------------|-------------------------|----------|
| <b>Model</b>               | B0385-34310               | <b>TSUGAMI Part No.</b> |          |
| <b>Gear Ratio</b>          | 1 / 4<br>Max. Collet Dia. | <b>Max. Speed</b>       | 28000rpm |
| <b>Collet</b>              | ER11-M                    |                         |          |
| <b>Compatible Machines</b> | B0266 / B0326/ B0385      |                         |          |

| Model       | A  | B  | C  | D  | E    | F    | G   | H   |
|-------------|----|----|----|----|------|------|-----|-----|
| B0385-34310 | 44 | 60 | 30 | 51 | 67.7 | 66.5 | Ø41 | Ø42 |

Unit: mm

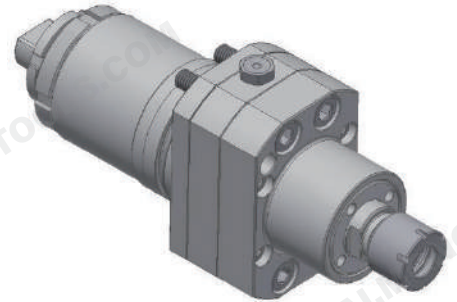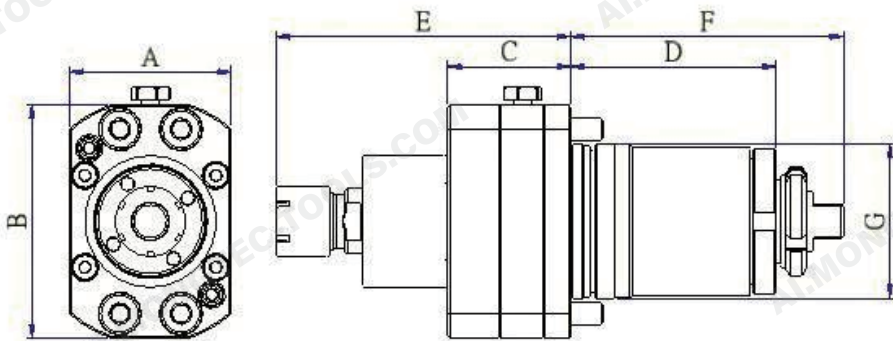


#### 4x-Speed Backworking Tool Holder

|                            |                           |                         |          |
|----------------------------|---------------------------|-------------------------|----------|
| <b>Model</b>               | S205A-34310               | <b>TSUGAMI Part No.</b> |          |
| <b>Gear Ratio</b>          | 1 / 4<br>Max. Collet Dia. | <b>Max. Speed</b>       | 28000rpm |
| <b>Collet</b>              | ER11-M                    |                         |          |
| <b>Compatible Machines</b> | S205A / S206              |                         |          |

| Model       | A  | B  | C  | D  | E    | F    | G |
|-------------|----|----|----|----|------|------|---|
| S205A-34310 | 37 | 53 | 28 | 47 | 67.2 | 62.3 |   |

Unit: mm

Specifications and dimensions are for reference only and subject to change without notice. Please confirm the latest specifications before ordering.

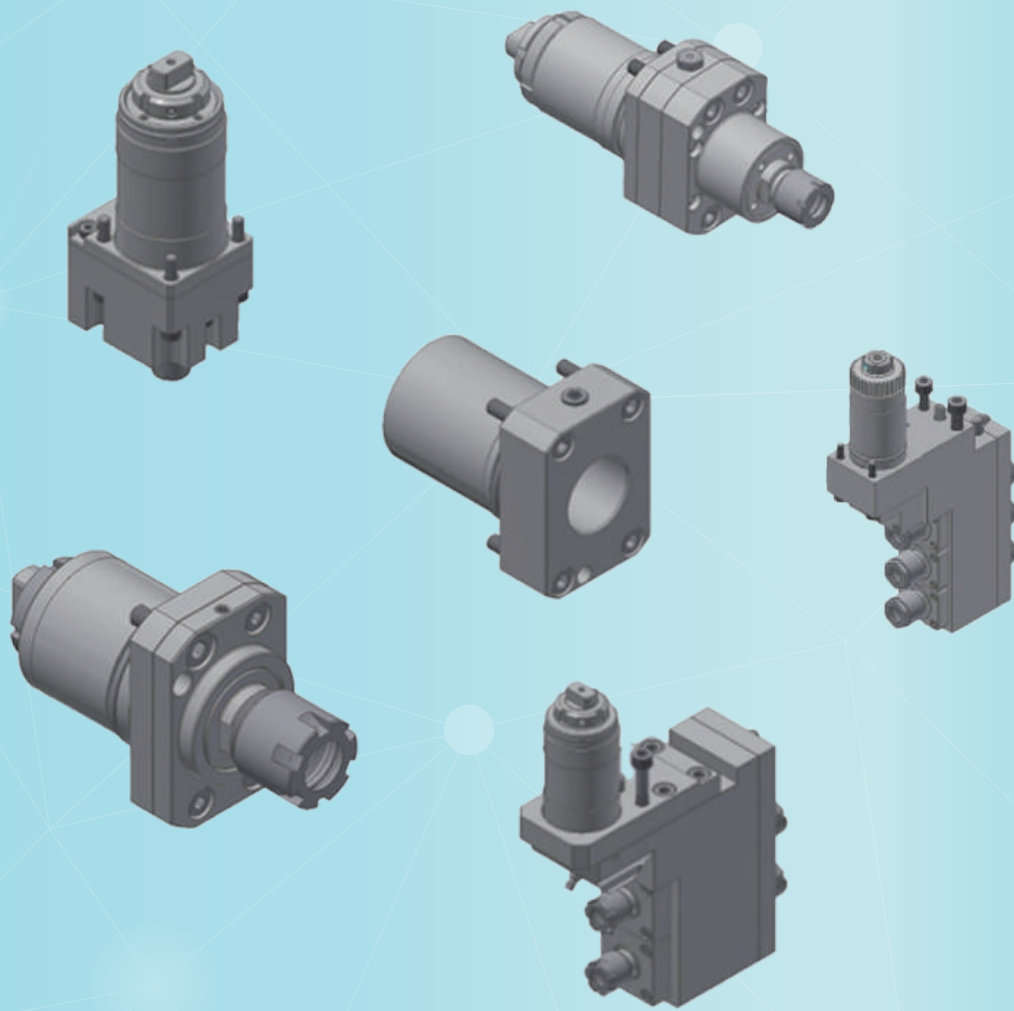

Facebook



WeChat



YouTube



Mongtec Web



LINE



WhatsApp



TEL : +886-4-22653360

FAX : +886-4-22653386

E-mail : [info@mongtec.com](mailto:info@mongtec.com)

No. 87, Sec. 1, Daqing St., South Dist., Taichung City 402024, Taiwan (R.O.C.)